

Control and signaling units Ø 22

Harmony[®] XB5 Plastic

Catalog

August 2015



How can you fit a 6000-page catalog in your pocket ?

Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format



Contact your local representative to get your own Digi-Cat



e-Library, the app for tablets


If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code

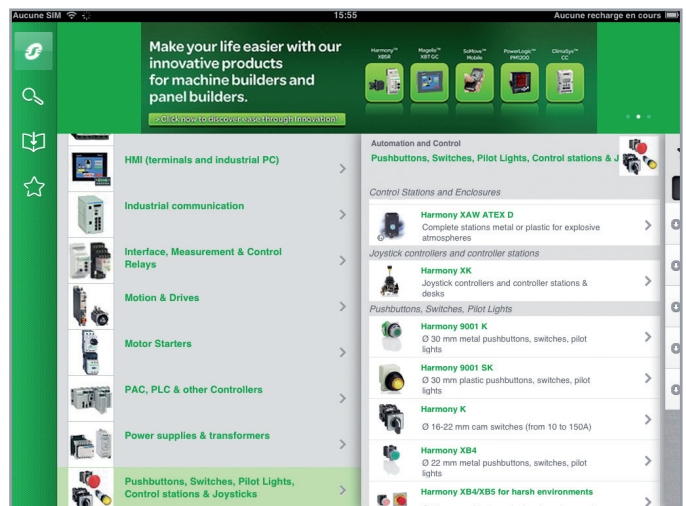

General contents

Harmony® XB5 plastic

Selection guide page 4

■ General







□ Presentation page 4
□ Description page 5

■ Installation




















□ Contact mounting - Contact sequence page 12

■ References

- Spring return, pushbuttons page 14
- Illuminated pushbuttons, spring return
 - With integral LED page 19
 - With BA 9s base fitting page 21
- Multiple-headed pushbuttons, spring return page 22
- Mushroom head pushbuttons, spring return type or latching type page 24
- Emergency stop and Emergency switching off functions page 26
- General safe stop page 27
- Pushbuttons and Illuminated pushbuttons, push-push page 28
- Pushbuttons, “push-turn to release” page 29
- Selector switches with standard handle or with long handle page 30
- Key switches page 32
- Selector switches with knurled knob - Toggle switches page 33
- Illuminated selector switches, with standard handle, and integral LED page 34
- Pilot lights
 - With integral LED page 36
 - Integral LED and with BA 9s base fitting page 37
- Specific functions
 - Manual overload reset pushbuttons page 38
 - Heads for potentiometer, hour counters, annunciators and fuse carrier page 38
 - Joystick controllers with screw clamp terminal connections page 39
- Contact and illuminated functions (blocks & bodies)
 - With screw clamp terminal connections page 40
 - With spring clamp terminal connections page 42
 - For printed circuit board page 43
 - With Faston or plug-in connectors page 44
- Body/contact assemblies and light blocks
 - With integral LED page 46
 - With BA 9s base fitting page 50
- Accessories
 - For heads page 52
 - For pushbuttons page 62
 - Legends and legend holders page 56
- **Product reference index** page 66

Type of products	Pilot lights	Pushbuttons, selector switches and pilot lights			Biometric switches
					
					
					
					
Description of range	<ul style="list-style-type: none"> LED pilot lights 	<ul style="list-style-type: none"> Pushbuttons Multiple-headed pushbuttons Emergency Stop pushbuttons Selector switches and key switches Illuminated pushbuttons Pilot lights 			<ul style="list-style-type: none"> Fingerprint readers 24V ~ Stand-alone biometric switches Stand-alone USB biometric switches USB biometric switches dedicated to Schneider HMI (1)
Features	Products	Monolithic, compact, low consumption			Monolithic
	Bezel	Double insulated	Double insulated (3)	Metal, chromium plated or black	Double insulated, dark grey
	Shape of head	Circular	Circular, square or rectangular	Circular	Circular or square
Drilling or cut-out for fixing	Ø 8 mm and Ø 12 mm/0.315 in. and 0.472 in.	Ø 16 mm/0.630 in.	Ø 22 mm/0.866 in.		
Degree of protection	Conforming to IEC 60529	IP 40 IP 65 with seal	IP 65	IP 66 IP 69K (Selector switches and key switches, multiple-headed pushbuttons and Emergency Stop pushbuttons with bellows)	IP 65 (control button)
	Conforming to UL 508 and CSA C22-2 N° 14	–	Enclosure type 4, 4X and 13		Enclosure type 12
Cabling	Tags for 2.8 x 0.5 mm/0.110 x 0.020 in. connectors or threaded connector	Faston connectors Solder pins for printed circuit boards (3) Fast connector socket (4)	Spring clamp terminal connections Screw clamp terminal connections Faston connectors Connector With adaptor for printed circuit board		Cable or connectors
Mounting	Panel thickness	1...8 mm/0.039...0.315 in.	1...6 mm/0.039...0.236 in.		
Type references	XVLA	XB6, XB6E	XB4	XB5	XB5S

(1) Compatible with Magelis iPC, STU, OT, GXO, GT (except GT1000 series), GK, GH, and GTO models.
 (2) Wireless and batteryless pushbutton and receiver ready-paired at the factory.

Wireless and batteryless pushbuttons	Pushbuttons, selector switches and pilot lights	Joystick controllers	Pushbuttons, selector switches and pilot lights	Cam switches	
					
					
					
					
Description of range	<ul style="list-style-type: none"> Wireless and batteryless pushbuttons and rope pull switch Configurable receivers Access point Relay-antenna Mobile handy box or plastic boxes for wall mounting 	<ul style="list-style-type: none"> Pushbuttons Emergency Stop and Emergency switching off pushbuttons Selector switches and key switches Illuminated pushbuttons Pilot lights 	<ul style="list-style-type: none"> 2 or 4 direction Stay put or spring return 	<ul style="list-style-type: none"> Pushbuttons Emergency Stop buttons Selector switches and key switches Illuminated pushbuttons Pilot lights 	<ul style="list-style-type: none"> Switches Stepping switches Reversing and changeover switches Ammeter switches Voltmeter switches Reversing switches Star-delta and reversing star-delta switches Pole change switches
Features	Products	Ready-to-use packs (2) and "components" range	Monolithic	Complete units or sub-assemblies (body + head with lever)	Complete units or sub-assemblies (body + head)
	Bezel	Metal, chromium plated or double insulated, black	Double insulated, dark grey (or white for pilot lights)	Metal, chromium plated	Double insulated, black
	Shape of head	Transmitter with circular head	Circular	Circular	Hexagonal
Drilling or cut-out for fixing	Ø 22 mm/0.866 in.			Ø 30 mm/1.181 in.	Ø 16 or Ø 22 mm/0.630 or 0.866 in.: series K10 Ø 22 mm/0.866 in. and multifixing: series K1/K2 4 holes, 48 or 68 centres: series K30...K150
Degree of protection	Conforming to IEC 60529	IP 65	IP 65 (control buttons and pilot lights) IP 54 (Emergency switching off pushbuttons)	IP 65	IP 66
	Conforming to UL 508 and CSA C22-2 N° 14	Enclosure type 12	Enclosure type 3 (pushbuttons and Emergency stop) and 4 (pilot lights)	Enclosure type 4, 4X and 13	Enclosure type 4 and 13 (9001K) Enclosure type 4, 4X, 13 (9001SK)
Cabling	Wireless (transmitter) Through cable (receiver)	Screw and captive clamp terminal connections	Screw and captive clamp terminal connections Faston clip connections (pilot lights)	Screw and captive clamp terminal connections	
Mounting	Panel thickness	1...6 mm/0.039...0.236 in.			0.5...6 mm/0.020...0.236 in. (depending on model)
Type references	XB5R, XB4R	XB7	XD4PA	XD2GA	XD5PA
			9001K, 9001SK	K10, K1, K2, K30, K50, K63, K115, K150	

(3) For Harmony XB6 only
 (4) For Harmony XB6E only

Presentation

The Harmony® XB5 range of plastic control and signaling units combines simplicity of installation and flexibility. It provides a solution for industrial applications demanding a high resistance to chemical agents and also provides double electrical insulation.

- This range includes:
 - Pushbuttons and switches designed for Start/Stop control of machines and installations, adjustment and parametering (contact functions): Pushbuttons, selector/key switches, Emergency stop or Emergency switching off functions, multiple-headed pushbuttons
 - Pilot lights designed for visual signaling (signaling functions)
 - Illuminated pushbuttons designed for control and signaling (contact and signaling functions)
- These products are shown on the following pages in two forms:
 - Complete units with black plastic bezel
 - Sub-assemblies for user assembly (body sub-assemblies and head sub-assemblies with black plastic bezel)
- The pushbutton and switch control offer (illuminated and non-illuminated) is both broad and comprehensive:
 - Flush, projecting, recessed, booted, spring return, push-pull, marked or unmarked pushbuttons
 - Emergency stop trigger action and mechanically latching pushbuttons (conforming to standards EN/IEC 60204-1 and EN/ISO 13850)
 - Emergency switching off mechanically latching pushbuttons (conforming to standard IEC 60364-5-53)
 - Selector switches with standard handle, long handle or knurled knob, key switches
 - Controllers
 - Wide choice of legends and legend holders
 - Wide choice of head colors
 - Wide choice of accessories and spare parts
- The pilot light signaling offer includes pilot lights with integral LED and pilot lights for BA 9s base fitting bulbs. The two types of pilot light are for direct supply or via integral transformer.
- The XB5 range also includes innovative complementary offers:
 - Multiple-headed pushbuttons
 - Control and signaling units for harsh applications
 - Wireless and batteryless pushbuttons
 - Biometric switches

Installation

- Harmony XB5 products are both simple and quick to install:
 - Mounting by single installer (self-maintaining of the head in its cut-out)
 - Clip-together component system (head, body, contact blocks and LED)
 - Fixing by a single nut (anti-rotation plate)
 - Anti-loosening system for screw clamp terminals of contact blocks (thus avoiding frequent checking/retightening).
- Various types of connection are available: Screw clamp, connector, Faston connector, spring terminal or for printed circuit board.

Environment

- The performance features of the Harmony XB5 range meet the most demanding international standards and approvals:
 - EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4 and EN/IEC 60947-5-5
 - UL 508, CSA C22-2 n° 14, GB 14048.5
 - International certifications: UL, CSA, CCC, GOST
 - Marine certifications: BV, RINA, LROS, DNV, GL
- The range includes products for use in difficult industrial environments, due to:
 - Their high degree of protection for severe environments (IP 66/IP 69K)
 - Their resistance to high pressure cleaning
 - Their "all climates" TH compatibility
 - A wide choice of contact blocks with various breaking capacities (low, standard or high power switching)

For more technical information, please refer to Harmony XB5 products page in Schneider Electric website.

Control and signaling units Ø 22

Harmony XB5, plastic

Pushbuttons, switches and pilot lights


Complete units, sub-assemblies

The Ø 22 range of plastic (double insulated) control and signaling units comprises:

Complete units, XB5A




Pushbuttons and switches




Pilot lights

Sub-assemblies, ZB5A




Pushbuttons and switches:
body + head
sub-assemblies



Pilot lights:
body + head
sub-assemblies

Component parts and accessories, ZB

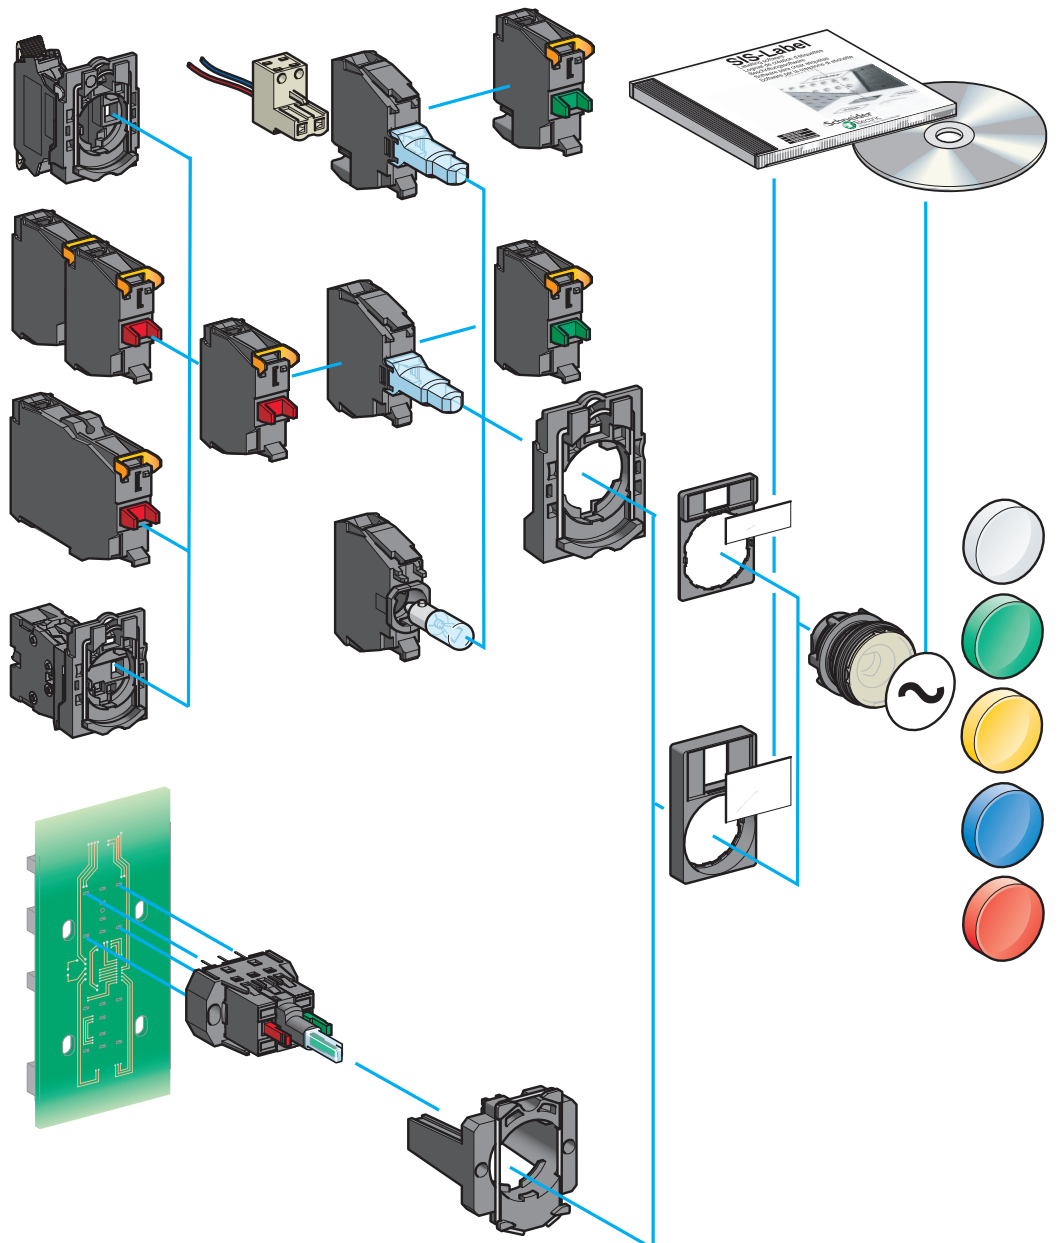

Control and signaling units Ø 22

Harmony XB5, plastic

Pushbuttons, switches and pilot lights:

complete units, XB5A

Complete units

Contact functions

Pushbuttons, spring return			
	Flush push, unmarked XB5AA●1/AA42 see page 14	Flush push, marked XB5AA3311/AA33●1 see page 18	Projecting push, marked XB5AL4322 see page 18

Pushbuttons, spring return			
	Booted flush push XB5AP●1/AP42 see page 17	Projecting push, unmarked XB5AL42 see page 16	Ø 40/1.575 in. Mushroom head XB5AC21 see page 24

Multiple-headed pushbuttons, spring return		
	Double-headed XB5AL73415 see page 22	Triple-headed XB5AA731327/XB5AA711237 see page 23

Emergency stop or Emergency switching off mushroom head pushbuttons			
	Emergency stop trigger action and mechanical latching		
	Ø 40/1.575 in. Push-pull (EN/ISO 13850) XB5AT845 see page 26	Ø 40/1.575 in. Turn to release (EN/ISO 13850) XB5AS8●4 see page 26	Ø 40/1.575 in. Key release (EN/ISO 13850) XB5AS9445 see page 26

Selector switches and key switches			
	Standard handle, black XB5AD●● see page 30	Long handle, black XB5AJ●● see page 31	Key switch XB5AG●● see page 32

References:
page 14




Control and signaling units Ø 22

Harmony XB5, plastic

Pushbuttons, switches and pilot lights:
complete units, XB5A

Complete units (continued)

Signaling functions




Pilot lights

Integral LED
XB5AVB●/AVG●/AVM●
see page 36

For bulb with BA 9s base fitting	Via integral transformer
Direct supply XB5AV6● see page 37	XB5AV3●/AV4● see page 37

Combined functions


Contact and signaling functions



Illuminated pushbuttons, spring return, flush push


Integral LED
XB5AW3●B5/AW3●G5/AW3●M5
see page 19

For bulb with BA 9s base fitting	Via integral transformer
Direct supply XB5AW3●65 see page 21	XB5AW3●35/AW3●45 see page 21



Double-headed pushbuttons, spring return, and pilot light block

Integral LED
XB5AW73731●5
see page 22



Illuminated selector switches, standard handle

Integral LED
XB5AK12●●5, XB5AK13●●5
see page 34


Control and signaling units Ø 22

Harmony XB5, plastic


Pushbuttons, switches and pilot lights:
sub-assemblies, ZB5A

Non illuminated units for user assembly


For pushbuttons, spring return, unmarked



Screw clamp terminals
ZB5AZ10●/AZ141
see page 40



Faston
ZB5AZ10●3
see page 44



Spring clamp terminals
ZBE10●5
ZB5AZ10●5
see page 42

For pushbuttons, spring return, marked

For multiple-headed pushbuttons, spring return

For "push-push to release" pushbuttons

For "push-turn to release" pushbuttons

Contact functions

Body sub-assemblies

Head sub-assemblies



Flush push without cap/with set of 6 caps
ZB5AA0/AA9
see page 14

Flush push
ZB5AA●
see page 14

Flush push for insertion of legend
ZB5AA●8
see page 14

Flush push, cap mounted/not mounted
ZB5CA0/CA●
see page 14




Projecting
ZB5AL●
see page 16



Recessed push
ZB5AA●
see page 15



Booted flush push, for insertion of legend
ZB5AP●●/AP●S
see page 17



Projecting or recessed push
ZB5CA●/CL●
see page 15



Flush push
ZB5AA●3●/AA●4●
see page 18



Projecting push
ZB5AL●
see page 18



Flush push
ZB5CA●3●/CA●9●
see page 18



Double-headed
ZB5AA7●●●/AA79
ZB5AL734●
see page 22



Triple-headed
ZB5AA7313●, ZB5AA711●●
ZB5AA72124, ZB5AA791
see page 23



Flush push (caps mounted/not mounted)
ZB5AH●●/CH●●
see page 28



Projecting push
ZB5AH●
see page 28



Flush push (caps mounted/not mounted)
ZB5CH0/CH0●
see page 28




Key switches
ZB5AFD●
see page 29



Knurled knob (1)
ZB5AF
see page 29

(1) Knob positions




Control and signaling units Ø 22

Harmony XB5, plastic

Pushbuttons, switches and pilot lights:
sub-assemblies, ZB5A


Non illuminated units for user assembly (continued)

For mushroom head pushbuttons



Screw clamp terminals
ZB5AZ10●/AZ141
see page 40


For Emergency stop or Emergency switching off mushroom head pushbuttons



Emergency stop trigger action and mechanical latching

Faston
ZB5AZ10●3
see page 44

Emergency switching off mechanical latching



Emergency stop trigger action and mechanical latching

Spring clamp terminals
ZBE10●5
ZB5AZ10●5
see page 42

For selector switches and key switches

For toggle switches


Contact functions (continued)

Body sub-assemblies

Head sub-assemblies




Ø 30 mm/1.18 in.
Ø 40 mm/1.57 in.
Ø 60 mm/2.36 in.




Ø 30 mm/1.18 in.
Ø 40 mm/1.57 in.
Ø 60 mm/2.36 in.

Spring
ZB5AC●/AR●
see page 24

Latching
ZB5A●2/AS●2/AS55
see page 25



Ø 30 mm/1.18 in.
Ø 40 mm/1.57 in.
Ø 60 mm/2.36 in.




Ø 30 mm/1.18 in.
Ø 40 mm/1.57 in.
Ø 60 mm/2.36 in.

Push-pull (EN/ISO 13850)
ZB5AT84
see page 26


Turn to release (EN/ISO 13850)
ZB5AS8●4
see page 26

Push-pull (IEC 60364-5-53)
ZB5AT●/AX●
see page 27




Ø 30 mm/1.18 in.
Ø 40 mm/1.57 in.
Ø 60 mm/2.36 in.

Key release (EN/ISO 13850)
ZB5AS9●4/AS944D, see page 26




Standard handle (1)
ZB5AD●
see page 30

Long black handle (1)
ZB5AJ●
see page 31




Knurled black knob (1)
ZB5AD●9
see page 33





Key switch (2)
ZB5AG●●
see page 33

(1) Switch handle and knob positions




(2) Key switch positions
Key withdrawal positions



2-position lever (3)
ZB5AD●8
see page 33

(3) Lever positions




Control and signaling units Ø 22

Harmony XB5, plastic
Pushbuttons, switches and pilot lights:
sub-assemblies, ZB5A


Pilot lights for user assembly

Signaling functions

Body sub-assemblies with integral LED




Connection: screw clamp terminals
ZB5AVB●/AVG●/AVM●
see page 48




Connection: plug-in connector
Please consult our Customer Care Centre

Body sub-assemblies for BA 9s bulb




Direct supply
Connection: screw clamp terminals
ZB5AV6, see page 51




Via integral transformer
Connection: screw clamp terminals
ZB5AV●/AV3D●/AV5D●
see page 51

Head sub-assemblies



With lens fitted (insertion of legend)
ZB5AV0●3/AV0●3E, see page 36



With lens fitted
ZB5CV0●3, see page 36




With 5 lens caps (not fitted) for insertion of legend
ZB5AV003/AV0●3●, see page 36



With 5 separate lens caps, not fitted
ZB5CV003, see page 36

Head sub-assemblies




With lens fitted
ZB5AV0●, see page 37


Illuminated pushbuttons for user assembly

Combined functions (contact and signaling)

Body sub-assemblies for BA 9s bulb




Direct supply
Connection: screw clamp terminals
ZB5AW06●, see page 50




Via integral transformer
Connection: screw clamp terminals
ZB5AW03●/AW04●/AW05●
see page 50

Head sub-assemblies



Flush
ZB5AW3●/AW3●S, see page 20



Projecting
ZB5AW1●/AW1●S, see page 20

Control and signaling units Ø 22

Harmony XB5, plastic

Pushbuttons, switches and pilot lights:

sub-assemblies, ZB5A

Illuminated pushbuttons for user assembly

For illuminated pushbuttons, spring return

For double-headed pushbuttons, spring return, with pilot light

For illuminated, mushroom head pushbuttons, latching

For illuminated mushroom head pushbuttons

- Emergency stop with trigger action and mechanical latching

or


- Emergency switching off with mechanical latching only

For illuminated "push-push to release" pushbuttons


For illuminated selector switches, standard handle

Combined functions (contact and signaling) (continued)


Body sub-assemblies with integral LED



Connection: screw clamp terminals
ZB5AW0B●●/AW0G●●/AW0M●●
 see page 46



Connection: plug-in connector
 Please consult our Customer Care Centre



Connection: spring clamp terminals
ZBV●●5
 see page 42


Head sub-assemblies



Flush push
 Flush push with illuminated ring
ZB5AW3●3/AW3●3S/AW9●3
 see page 20



Flush push
 for insertion of legend
ZB5AA●8
 see page 14



Booted flush push
ZB5AW5●3
 see page 20




Projecting push
ZB5AW1●3/AW1●3S
 see page 20




Flush or projecting push
 Flush or projecting push for insertion of legend
ZB5CW3●3/CW1●3
 see page 20




Double-headed (flush/flush push) + central pilot light
 Double-headed (flush/projecting push) + central pilot light
ZB5AW7A17●●, ZB5AW7A374●●, ZB5AW7A9, see page 22
ZB5AW7L374●●, see page 22



Ø 40/1.575 in. Turn to release
ZB5AW7●3, see page 25



Ø 40/1.575 in. Push-pull with mechanical state indicator (EN/ISO 13850)
ZB5AT8643M
 see page 26




Ø 40/1.575 in. Turn to release (IEC 60364-5-53)
ZB5AW743
 see page 27



Flush or projecting "push-push to release"
ZB5AH0●3/AH●3
 see page 28



Flush "Push-push to release"
ZB5CH3●3
 see page 28



Standard handle (1)
ZB5AK1●●3
 see page 35

(1) Handle positions




Control and signaling units Ø 22

Harmony XB5 plastic
Contact mounting - Contact sequence


Maximum recommended configurations guaranteeing achievement of catalog characteristics

Unit type (complete units XB5B, heads ZB5B)	Pushbuttons, spring return XB5AA●, ZB5AA●, (except ZB5AA●8) XB5AC●, ZB5AC●, XB5AL●, ZB5AL●, XB5AP●, ZB5AP●, ZB5AR● Triple-headed pushbuttons XB5AA731327, XB5AA711137, ZB5AA7313●, ZB5AA7111●, ZB5AA72124, ZB5AA791	Double-headed pushbuttons XB5AL73415, ZB5AA712●, ZB5A●734●, ZB5AA79	Illuminated pushbuttons, spring return XB5AW●, ZB5AW●, ZB5AA●8 Double-headed pushbuttons + pilot light block XB5AW73731●5, ZB5AW7A17●●, ZB5AW7●374●, ZB5AW7A9	
Solution using single contacts				
Solution using single and double contacts				
Maximum recommended configurations	Single contacts Double contacts + Single contacts Light block	9 3 + 3 -	6 2 + 2 -	6 2 + 2 1

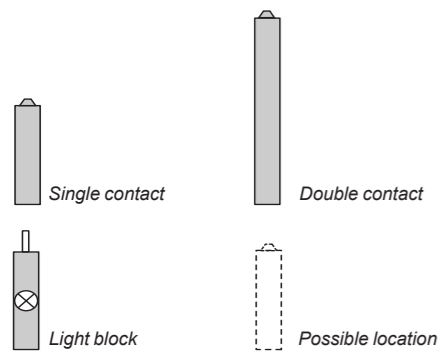

Possible configurations for high power switching contacts (1) (2)

High power switching contact blocks with screw clamp terminal connections : ZBE501, ZBE502, ZBE503, ZBE504 and ZBE505
High power switching contact blocks with connection by Faston connectors ZBE5013, ZBE5023, ZBE5033, ZBE5043 and ZBE5053

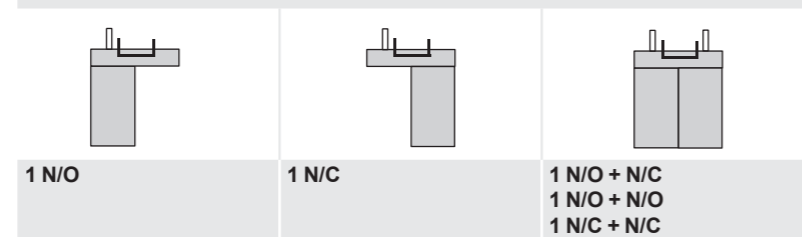

(1) The configurations are not upgradable and cannot be combined with other types of contact and signaling functions.
(2) High power switching contacts are not compatible with Harmony triple-headed pushbuttons.

Sequence of contacts fitted to selector switch bodies

Emergency stop or Emergency switching off XB5AT●, ZB5AT●, XB5AS●, ZB5AS●	Selector switches XB5AD●, ZB5AD●, ■ Standard handle XB5AJ●, ZB5AJ●, ■ Long handle ZB5AD●9, ■ Key switch XB5AG●, ZB5AG●		Illuminated selector switches with standard handle XB5AK●, ZB5AK●	Toggle switches ZB5AD●8 Pushbuttons, push-turn to release, knurled operator ZB5AF●, or lockable ZB5FAD●	Pushbuttons, push-push ZB5AH●	Illuminated pushbuttons, push-push ZB5AH●3 ZB5AW743 Illuminated Emergency Stop ZB5AT8643M
4 2 + 0 -	4 1 + 2 -	5 2 + 1 -	4 1 + 2 -	6 2 + 2 1	3 - - -	2 - - 1

Sequence of contacts fitted to selector switch bodies

Unit type	Selector switches	
	2-position	3-position
Push	Position Top Bottom Location L C R State 0 0 0 / 1 1 1 Contacts N/O N/C	315° 45° 315° 0° 45° Position Top Bottom Location L C R / L C R / L C R State 1 1 0 / 0 0 0 / 0 1 1 Contacts N/O N/C

L left, C centre, R right
□ open, ■ closed

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Spring return pushbuttons, unmarked



XB5AA31



ZB5AA0



ZB5AA5





ZB5AA68




ZB5CA5

Pushbuttons with flush push ⁽¹⁾






Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of push	Type of contact		Color of push	Reference	Weight kg/lb
		 N/O	 N/C			



Complete units

	Flush	1	-	White	XB5AA11 (ZB5AZ101 + ZB5AA1)	0.037/0.082
				Black	XB5AA21 (ZB5AZ101 + ZB5AA2)	0.037/0.082
				Green	XB5AA31 (ZB5AZ101 + ZB5AA3)	0.037/0.082
				Yellow	XB5AA51 (ZB5AZ101 + ZB5AA5)	0.037/0.082
				Blue	XB5AA61 (ZB5AZ101 + ZB5AA6)	0.037/0.082
				Red	XB5AA42 (ZB5AZ102 + ZB5AA4)	0.037/0.082

Heads only, circular

	Without cap ⁽²⁾	-	ZB5AA0	0.022/0.049
	Flush, with set of 6 colored caps	6 colors ⁽³⁾	ZB5AA9	0.027/0.060
	Flush	White	ZB5AA1	0.018/0.040
		Black	ZB5AA2	0.018/0.040
		Green	ZB5AA3	0.018/0.040
		Red	ZB5AA4	0.018/0.040
		Yellow	ZB5AA5	0.018/0.040
		Blue	ZB5AA6	0.018/0.040
		Grey	ZB5AA8	0.018/0.040
			Flush with transparent cap for insertion of legend ⁽⁴⁾	White
Green	ZB5AA38			0.018/0.040
Red	ZB5AA48			0.018/0.040
Yellow	ZB5AA58			0.018/0.040
Blue	ZB5AA68			0.018/0.040
	Flush (high bezel)			White
		Black	ZB5AA24	0.020/0.044
		Green	ZB5AA34	0.020/0.044
		Red	ZB5AA44	0.020/0.044
		Yellow	ZB5AA54	0.020/0.044
		Blue	ZB5AA64	0.020/0.044

Heads only, square

	Without cap ⁽²⁾	-	ZB5CA0	0.022/0.049
	Flush	White	ZB5CA1	0.019/0.042
		Black	ZB5CA2	0.019/0.042
		Green	ZB5CA3	0.019/0.042
		Red	ZB5CA4	0.019/0.042
		Yellow	ZB5CA5	0.019/0.042
		Blue	ZB5CA6	0.019/0.042

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Colored cap to be ordered separately, see page 52.

(3) Head supplied with 6 different colored caps (white, black, green, red, yellow, or blue) not fitted.

(4) For legend ordering information, see page 61.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Spring return pushbuttons, unmarked

PG113892



ZB5AA16


PG113886




ZB5CA16

Pushbuttons with recessed push (1)

High guard

Shape of head	Type of push	Color	Reference	Weight kg/lb
Heads only, circular				
	Recessed (high guard)	White	ZB5AA16	0.020/0.044
		Black	ZB5AA26	0.020/0.044
		Green	ZB5AA36	0.020/0.044
		Red	ZB5AA46	0.020/0.044
		Yellow	ZB5AA56	0.020/0.044
		Blue	ZB5AA66	0.020/0.044

Heads only, square

	Recessed (high guard)	White	ZB5CA16	0.012/0.026
		Black	ZB5CA26	0.012/0.026
		Green	ZB5CA36	0.012/0.026
		Red	ZB5CA46	0.012/0.026
		Yellow	ZB5CA56	0.012/0.026
		Blue	ZB5CA66	0.012/0.026

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52



XB5AL42



ZB5AL3



ZB5CL1

Pushbuttons with projecting push ⁽¹⁾						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of push	Type of contact		Color of push	Reference	Weight kg/lb
		N/O	N/C			

Complete units						
	Projecting	–	1	Red	XB5AL42 (ZB5AZ102 + ZB5AL4)	0.038/0.084

Heads only, circular						
	Projecting			White	ZB5AL1	0.019/0.042
				Black	ZB5AL2	0.019/0.042
				Green	ZB5AL3	0.019/0.042
				Red	ZB5AL4	0.019/0.042
				Yellow	ZB5AL5	0.019/0.042
				Blue	ZB5AL6	0.019/0.042

Heads only, square						
	Projecting			White	ZB5CL1	0.021/0.046
				Black	ZB5CL2	0.021/0.046
				Green	ZB5CL3	0.021/0.046
				Red	ZB5CL4	0.021/0.046
				Yellow	ZB5CL5	0.021/0.046
				Blue	ZB5CL6	0.021/0.046

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

Assembly of other products using:
body/contact assemblies: see page 40
combined sub-assemblies: see page 46
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Spring return pushbuttons, unmarked



XB5AP51



ZB5AP4



ZB5AP2S



ZB5AP383

Pushbuttons with booted head (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of push	Type of contact		Color of push	Reference	Weight kg/lb
		N/O	N/C			

Complete units

	Booted, clear silicone (color of push unobscured)	1	-	Black	XB5AP21 (ZB5AZ101 + ZB5AP2)	0.039/0.086
				Green	XB5AP31 (ZB5AZ101 + ZB5AP3)	0.039/0.086
				Yellow	XB5AP51 (ZB5AZ101 + ZB5AP5)	0.039/0.086
				Blue	XB5AP61 (ZB5AZ101 + ZB5AP6)	0.039/0.086
		-	1	Red	XB5AP42 (ZB5AZ102 + ZB5AP4)	0.039/0.086

Silicone booted heads only, with increased protection (IP 69K)

	Flush	Clear boot (2) For insertion of protected legend within head (3)	White	ZB5AP18	0.023/0.051
			Green	ZB5AP38	0.023/0.051
			Red	ZB5AP48	0.023/0.051
			Yellow	ZB5AP58	0.023/0.051
			Blue	ZB5AP68	0.023/0.051

Projecting

	Projecting	Clear boot (2)	White	ZB5AP1	0.014/0.031
			Black	ZB5AP2	0.014/0.031
			Green	ZB5AP3	0.014/0.031
			Red	ZB5AP4	0.014/0.031
			Yellow	ZB5AP5	0.014/0.031
			Blue	ZB5AP6	0.014/0.031

Silicone booted heads only, standard for mouting with legend holder (IP 66)

	Flush	Colored boot (4)	White	ZB5AP1S	0.021/0.046
			Black	ZB5AP2S	0.021/0.046
			Green	ZB5AP3S	0.021/0.046
			Red	ZB5AP4S	0.021/0.046
			Yellow	ZB5AP5S	0.021/0.046
			Blue	ZB5AP6S	0.021/0.046
		Clear membrane (4) For insertion of protected legend within head (3)	White	ZB5AP183	0.010/0.022
			Green	ZB5AP383	0.010/0.022
			Red	ZB5AP483	0.010/0.022
			Yellow	ZB5AP583	0.010/0.022
			Blue	ZB5AP683	0.010/0.022



(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.






(2) Permissible panel thickness 1 to 5 mm/0.039 to 0.197 in., cannot be used with legend holders.




(3) To order a legend for insertion within the head, see page 61.


(4) Replacement of silicone protection element without dismantling head, see page 54.


Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Pushbuttons with flush or projecting push (1)							
Screw clamp terminal connections (Schneider Electric anti-loosening system)							
Shape of head	Type of push	Type of contact		Marking Text (color)	Color of push	Reference	Weight kg/lb
							
		N/O	N/C				

Complete units							
	Flush	1	–	"I" (white)	Green	XB5AA3311 (ZB5AZ101 + ZB5AA331)	0.037/0.082
	Flush	–	1	"O" (white)	Red	XB5AA4322 (ZB5AZ102 + ZB5AA432)	0.037/0.082
	Projecting	–	1	"O" (white)	Red	XB5AL4322 (ZB5AZ102 + ZB5AL432)	0.037/0.082
	Flush (2)	1	–	↑ (black)	White	XB5AA3341 (ZB5AZ101 + ZB5AA334)	0.037/0.082
	Flush (2)	1	–	↓ (white)	Black	XB5AA3351 (ZB5AZ101 + ZB5AA335)	0.037/0.082

Heads only, circular							
	Flush			"I" (white)	Green	ZB5AA331	0.018/0.040
				"I" (black)	White	ZB5AA131	0.018/0.040
				"II" (white)	Green	ZB5AA336	0.018/0.040
				"II" (black)	White	ZB5AA136	0.018/0.040
				"START" (white)	Green	ZB5AA333	0.018/0.040
				"START" (black)	White	ZB5AA133	0.018/0.040
				"ON" (white)	Green	ZB5AA341	0.018/0.040
				"ON" (black)	White	ZB5AA141	0.018/0.040
				"MARCHE" (white)	Green	ZB5AA342	0.018/0.040
				"MARCHE" (black)	White	ZB5AA142	0.018/0.040
				 (white)	Black	ZB5AA245	0.018/0.040
				 (black)	White	ZB5AA145	0.018/0.040
				"O" (white)	Red	ZB5AA432	0.018/0.040
					Black	ZB5AA232	0.018/0.040
				"ARRET" (white)	Red	ZB5AA433	0.018/0.040
					Black	ZB5AA233	0.018/0.040
				"STOP" (white)	Red	ZB5AA434	0.018/0.040
					Black	ZB5AA234	0.018/0.040
				"OFF" (white)	Red	ZB5AA435	0.018/0.040
					Black	ZB5AA235	0.018/0.040
				UP (black)	White	ZB5AA343	0.018/0.040
				Down (white)	Black	ZB5AA344	0.018/0.040
				↑ (black) (2)	White	ZB5AA334	0.018/0.040
				↓ (white) (2)	Black	ZB5AA335	0.018/0.040

Heads only, square							
	Flush (2)			"I" (white)	Green	ZB5CA331	0.019/0.042
				"O" (white)	Red	ZB5CA432	0.019/0.042
				"+" (white)	Black	ZB5CA2934	0.019/0.042
				↑ (white)	Black	ZB5CA2912	0.019/0.042
				"R" (white)	Blue	ZB5CA6939	0.019/0.042

Heads only, circular							
	Projecting (2)			"O" (white)	Red	ZB5AL432	0.019/0.042
					Black	ZB5AL232	0.019/0.042
				"ARRET" (white)	Red	ZB5AL433	0.019/0.042
					Black	ZB5AL233	0.019/0.042
				"STOP" (white)	Red	ZB5AL434	0.019/0.042
					Black	ZB5AL234	0.019/0.042
				"OFF" (white)	Red	ZB5AL435	0.019/0.042
					Black	ZB5AL235	0.019/0.042

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Product supplied with cap not clipped-in, allowing orientation through 360° in 90° steps.



XB5AA4322



ZB5AA331



ZB5AA432



ZB5CA432



ZB5AL232

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52





Control and signaling units Ø 22

Harmony XB5, plastic

Illuminated pushbuttons, spring return, with integral LED

Illuminated pushbuttons with flush push (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Description	Type of contact		Supply voltage V	Color of push	Reference	Weight kg/lb	
								
		N/O	N/C					
Complete units - With plain lens								
 XB5AW31B5		Integral LED	1	1	~ 24 50/60 Hz	White	XB5AW31B5 (ZB5AW0B15 + ZB5AW313)	0.056/0.123
						Green	XB5AW33B5 (ZB5AW0B35 + ZB5AW333)	0.056/0.123
						Red	XB5AW34B5 (ZB5AW0B45 + ZB5AW343)	0.056/0.123
						Orange	XB5AW35B5 (ZB5AW0B55 + ZB5AW353)	0.056/0.123
						Blue	XB5AW36B5 (ZB5AW0B65 + ZB5AW363)	0.056/0.123
						~ 110...120 50/60 Hz	White	XB5AW31G5 (ZB5AW0G15 + ZB5AW313)
					Green	XB5AW33G5 (ZB5AW0G35 + ZB5AW333)	0.056/0.123	
					Red	XB5AW34G5 (ZB5AW0G45 + ZB5AW343)	0.056/0.123	
					Orange	XB5AW35G5 (ZB5AW0G55 + ZB5AW353)	0.056/0.123	
					Blue	XB5AW36G5 (ZB5AW0G65 + ZB5AW363)	0.056/0.123	
					~ 230...240 50/60 Hz	White	XB5AW31M5 (ZB5AW0M15 + ZB5AW313)	0.056/0.123
					Green	XB5AW33M5 (ZB5AW0M35 + ZB5AW333)	0.056/0.123	
Red	XB5AW34M5 (ZB5AW0M45 + ZB5AW343)	0.056/0.123						
Orange	XB5AW35M5 (ZB5AW0M55 + ZB5AW353)	0.056/0.123						
Blue	XB5AW36M5 (ZB5AW0M65 + ZB5AW363)	0.056/0.123						

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

101285

101287

XB5AW34G5

Assembly of other products using:
combined sub-assemblies: see page 46
accessories: see page 52



ZB5AW313



ZB5AW363



ZB5CW313



ZB5CW3136



ZB5AW143



ZB5CW143

Illuminated pushbuttons with flush push (1)

Shape of head	Type of push	Color	Reference	Weight kg/lb
Heads only, circular (2) - With plain lens				
	Flush	White	ZB5AW313	0.017/0.037
		Green	ZB5AW333	0.017/0.037
		Red	ZB5AW343	0.017/0.037
		Orange	ZB5AW353	0.017/0.037
		Blue	ZB5AW363	0.017/0.037
	Flush with illuminated ring	White	ZB5AW913	0.016/0.035
		Green	ZB5AW933	0.016/0.035
		Red	ZB5AW943	0.016/0.035
		Orange	ZB5AW953	0.016/0.035
		Blue	ZB5AW963	0.016/0.035
	Flush with clear boot (IP 69 K)	White	ZB5AW513	0.019/0.042
		Green	ZB5AW533	0.019/0.042
		Red	ZB5AW543	0.019/0.042
		Orange	ZB5AW553	0.019/0.042
		Blue	ZB5AW563	0.019/0.042
	Flush for insertion of legend (3) (IP 69 K)	White	ZB5AA18	0.018/0.040
		Green	ZB5AA38	0.018/0.040
		Red	ZB5AA48	0.018/0.040
		Orange	ZB5AA58	0.018/0.040
		Blue	ZB5AA68	0.018/0.040

Heads only, circular (2) - With grooved lens (4)

	Flush	White	ZB5AW313S	0.017/0.037
		Green	ZB5AW333S	0.017/0.037
		Red	ZB5AW343S	0.017/0.037
		Orange	ZB5AW353S	0.017/0.037
		Blue	ZB5AW363S	0.017/0.037

Heads only, square (2)

	Flush (legend can be inserted)	White	ZB5CW313	0.023/0.051
		Green	ZB5CW333	0.023/0.051
		Red	ZB5CW343	0.023/0.051
		Orange	ZB5CW353	0.023/0.051
		Blue	ZB5CW363	0.023/0.051
	Flush (high guard)	White	ZB5CW3136	0.014/0.031
		Green	ZB5CW3336	0.014/0.031
		Red	ZB5CW3436	0.014/0.031
		Orange	ZB5CW3536	0.014/0.031
		Blue	ZB5CW3636	0.014/0.031

Illuminated pushbuttons with projecting push (1)

Shape of head	Type of push	Color	Reference	Weight kg/lb
Heads only, circular (2) - With plain lens				
	Projecting	White	ZB5AW113	0.018/0.040
		Green	ZB5AW133	0.018/0.040
		Red	ZB5AW143	0.018/0.040
		Orange	ZB5AW153	0.018/0.040
		Blue	ZB5AW163	0.018/0.040
	Projecting	White	ZB5AW113S	0.017/0.037
		Green	ZB5AW133S	0.017/0.037
		Red	ZB5AW143S	0.017/0.037
		Orange	ZB5AW153S	0.017/0.037
		Blue	ZB5AW163S	0.017/0.037
Heads only, square (2)				
	Projecting (legend can be inserted)	White	ZB5CW113	0.024/0.053
		Green	ZB5CW133	0.024/0.053
		Red	ZB5CW143	0.024/0.053
		Orange	ZB5CW153	0.024/0.053
		Blue	ZB5CW163	0.024/0.053

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Only for use with bodies comprising a light source with integral LED.

(3) For legend ordering information, see page 61.

(4) For use in bright ambient light conditions (for example, outdoors in sunlight).

Assembly of other products using:
combined sub-assemblies: see page 46
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Illuminated pushbuttons, spring return,
with BA 9s base fitting



XB5AW3465



XB5AW3335



ZB5AW33

Illuminated pushbuttons with flush push (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Description	Type of contact		Supply voltage V	Color of push	Reference	Weight kg/lb
		N/O	N/C				

Complete units - With plain lens

Shape of head	Description	Type of contact	Type of contact	Supply voltage V	Color of push	Reference	Weight kg/lb
	Direct supply for bulb with BA9s base fitting, 2.4 W max, (bulb not included)	1	1	≤ 250	White	XB5AW3165 (ZB5AW065 + ZB5AW31)	0.057/0.126
					Green	XB5AW3365 (ZB5AW065 + ZB5AW33)	0.057/0.126
					Red	XB5AW3465 (ZB5AW065 + ZB5AW34)	0.057/0.126
					Orange	XB5AW3565 (ZB5AW065 + ZB5AW35)	0.057/0.126
	Via integral transformer 1.2 VA, 6 V secondary, incandescent bulb with BA9s base fitting, (bulb included)	1	1	~ 110...120 50/60 Hz	White	XB5AW3135 (ZB5AW035 + ZB5AW31)	0.128/0.282
					Green	XB5AW3335 (ZB5AW035 + ZB5AW33)	0.128/0.282
					Red	XB5AW3435 (ZB5AW035 + ZB5AW34)	0.128/0.282
					Orange	XB5AW3535 (ZB5AW035 + ZB5AW35)	0.128/0.282
					White	XB5AW3145 (ZB5AW045 + ZB5AW31)	0.129/0.284
					Green	XB5AW3345 (ZB5AW045 + ZB5AW33)	0.129/0.284
				~ 230 50 Hz ~ 220...240 60 Hz	Red	XB5AW3445 (ZB5AW045 + ZB5AW34)	0.129/0.284
					Orange	XB5AW3545 (ZB5AW045 + ZB5AW35)	0.129/0.284

Heads only (2) - With plain lens

Shape of head	Description	Color of push	Reference	Weight kg/lb
	Flush	White	ZB5AW31	0.018/0.040
		Green	ZB5AW33	0.018/0.040
		Red	ZB5AW34	0.018/0.040
		Orange	ZB5AW35	0.018/0.040
		Blue	ZB5AW36	0.018/0.040
		Clear	ZB5AW37	0.018/0.040

Heads only (2) - With grooved lens (3)

Shape of head	Description	Color of push	Reference	Weight kg/lb
	Flush	White	ZB5AW31S	0.018/0.040
		Green	ZB5AW33S	0.018/0.040
		Red	ZB5AW34S	0.018/0.040
		Orange	ZB5AW35S	0.018/0.040
		Blue	ZB5AW36S	0.018/0.040
		Clear	ZB5AW37S	0.018/0.040

Illuminated pushbuttons with projecting push (1)

Heads only (2) - With plain lens

Shape of head	Description	Color of push	Reference	Weight kg/lb
	Projecting	White	ZB5AW11	0.017/0.037
		Green	ZB5AW13	0.017/0.037
		Red	ZB5AW14	0.017/0.037
		Orange	ZB5AW15	0.017/0.037
		Blue	ZB5AW16	0.017/0.037
		Clear	ZB5AW17	0.017/0.037

Heads only (2) - With grooved lens (3)

Shape of head	Description	Color of push	Reference	Weight kg/lb
	Projecting	White	ZB5AW11S	0.018/0.040
		Green	ZB5AW13S	0.018/0.040
		Red	ZB5AW14S	0.018/0.040
		Orange	ZB5AW15S	0.018/0.040
		Blue	ZB5AW16S	0.018/0.040
		Clear	ZB5AW17S	0.018/0.040

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Only for use with bodies comprising a light source with BA9s base fitting bulb (incandescent, neon or LED).

(3) For use in bright ambient light conditions (for example, outdoors in sunlight).

User assembly of other units, using:
body-contacts assemblies: see page 40
combined sub-assemblies: see page 46

Control and signaling units Ø 22

Harmony XB5 plastic

Multiple-headed pushbuttons, spring return



XB5AL73415



ZB5AA7121



ZB5AL7341



XB5AW73731B5



ZB5AW7A1721



ZB5AW7A3741

Double-headed pushbuttons ⁽¹⁾						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Description	Type of contact		Caps ⁽²⁾		Reference
		N/O	N/C	Marking	Background color	

Complete units						
	1 flush push, black 1 projecting push, red	1	1	White "I"	Green	XB5AL73415
				White "0"	Red	

Heads only							
	2 flush push, black			Unmarked	White	ZB5AA7120	0.023/0.051
				Unmarked	Black		
				Black "I"	White	ZB5AA7121	0.023/0.051
				White "0"	Black		
				Unmarked	Green	ZB5AA7340	0.023/0.051
				Unmarked	Red		
				White "I"	Green	ZB5AA7341	0.023/0.051
White "0"	Red						
	1 flush push, black 1 projecting push, red			Without cap ⁽³⁾		ZB5AA79	0.023/0.051
				Unmarked	Green		
				Unmarked	Red		
				White "I"	Green	ZB5AL7341	0.023/0.051
White "0"	Red						

Double-headed pushbuttons with 1 white central pilot light block ⁽¹⁾								
Screw clamp terminal connections (Schneider Electric anti-loosening system)								
Shape of head	Description	Type of contact		Caps		Pilot light voltage V	Reference	Weight kg/lb
		N/O	N/C	Marking	Background color			

Complete units										
	1 flush push, black 1 projecting push, red 1 central pilot light block, white	1	1	White "I"	Green	24	XB5AW73731B5	0.066/0.146		
				White "0"	Red	120			XB5AW73731G5	0.066/0.146
						240				

Heads only ⁽⁵⁾								
	2 flush push, black 1 central pilot light, clear ⁽⁴⁾			Unmarked	White	ZB5AW7A1720	0.023/0.051	
				Unmarked	Black			
				Black "I"	White	ZB5AW7A1721	0.023/0.051	
				White "0"	Black			
				Unmarked	Green	ZB5AW7A3740	0.023/0.051	
				Unmarked	Red			
				White "I"	Green	ZB5AW7A3741	0.023/0.051	
				White "0"	Red			
				Black "I"	Green	ZB5AW7A1724	0.023/0.051	
				White "0"	Red			
				Black "+"	White	ZB5AW7A1715	0.023/0.051	
				Black "-"	White			
				Without cap ⁽³⁾				ZB5AW7A9
	1 flush push, black 1 projecting push, red 1 central pilot light, clear ⁽⁴⁾			Unmarked	Green	ZB5AW7L3740	0.023/0.051	
				Unmarked	Red			
				White "I"	Green	ZB5AW7L3741	0.023/0.051	
White "0"	Red							

⁽¹⁾ Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

⁽²⁾ These caps are factory assembled and cannot be removed (risk of damage).

⁽³⁾ Caps to be ordered separately, see page opposite.

⁽⁴⁾ Color of centrally positioned pilot light determined by the color of the LED incorporated in the body sub-assembly.

⁽⁵⁾ Only for use with bodies comprising a light source with integral LED.

User assembly of other units, using:
body-contacts assemblies: see page 40
combined sub-assemblies: see page 46

Control and signaling units Ø 22

Harmony XB5 plastic

Multiple-headed pushbuttons, spring return



XB5AA731327



ZB5AA73133



ZB5AA71124



ZBA7235



ZBA7331



ZBA7432



ZBA709

Triple-headed pushbuttons (1) (2)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Description	Type of contact			Caps (3)		Reference	Weight kg/lb
		N/O	N/C	N/O	Marking	Background color		

Complete units

	2 flush push, black, 1 central projecting push, marked "Stop" in white	1	1	1	White "I"	Green	XB5AA731327	0.063/0.139
					White "II"	Green	XB5AA711237	0.063/0.139

Heads only

	2 flush push, black, 1 central projecting push, red marked "Stop" in white				White "I"	Green	ZB5AA73132	0.023/0.051
					White "II"	Green		
					White "←"	Green	ZB5AA73133	0.023/0.051
					White "→"	Green		
					White "↑"	Green	ZB5AA73134	0.023/0.051
					White "↓"	Green		
					White "+"	Green	ZB5AA73135	0.023/0.051
					White "-"	Green		
					Black "+"	White	ZB5AA71115	0.023/0.051
					Black "-"	White		
					Black "↔"	White	ZB5AA71123	0.023/0.051
					White "←"	Black		
					Black "↑"	White	ZB5AA71124	0.023/0.051
					White "↓"	Black		
					White "↕"	Black	ZB5AA72124	0.023/0.051
					White "↕"	Black		
			Without cap (4)		ZB5AA791	0.023/0.051		

Specific accessories for multiple-headed pushbuttons

Description	Marking	Background color	Sold in lots of	Reference	Weight kg/lb
Caps only for clip-on mounting (5) on: - ZB5AA79 double-headed pushbuttons - ZB5AW7A9 double-headed pushbuttons + central pilot light black - ZB5AA791 triple-headed pushbuttons	Unmarked	White	10	ZBA71	0.010/0.022
	"I" Black		10	ZBA7131	0.010/0.022
	"↑" Black		10	ZBA7134	0.010/0.022
	"+" Black		10	ZBA7138	0.010/0.022
	Unmarked	Black	10	ZBA72	0.010/0.022
	"O" White		10	ZBA7232	0.010/0.022
	"+" White		10	ZBA7233	0.010/0.022
	"↕" White		10	ZBA7235	0.010/0.022
	"I" White		10	ZBA7237	0.010/0.022
	Unmarked	Green	10	ZBA73	0.010/0.022
	"I" White		10	ZBA7331	0.010/0.022
	"+" White		10	ZBA7333	0.010/0.022
	"↑" White		10	ZBA7335	0.010/0.022
	"II" White		10	ZBA7336	0.010/0.022
	Unmarked	Red	10	ZBA74	0.010/0.022
	"O" White		10	ZBA7432	0.010/0.022
Unmarked	Yellow	10	ZBA75	0.010/0.022	
Unmarked	Blue	10	ZBA76	0.010/0.022	
Silicone boots for 2 flush push (6)	-	Clear	10	ZBA708	0.055/0.121
Silicone boots for 3 pushes (6)	-		10	ZBA709	0.055/0.121
Silicone boots for 1 flush push and 1 projecting push (6)	-		10	ZBA710	0.055/0.121

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Not compatible with high power switching contacts and contacts for printed circuit board.

(3) These caps are factory assembled and cannot be removed (risk of damage).

(4) Caps to be ordered separately, see accessories on this page.

(5) Can be clipped-in at 90° steps, through 360°.

(6) Can be replaced without dismantling the head.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Mushroom head pushbuttons, spring return



XB5AC21



ZB5AC24



ZB5AC2



ZB5AR4



ZB5AR216

Mushroom head pushbuttons (1) (2)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of push	Type of contact		Push	Reference		Weight kg/lb
		N/O	N/C		Diameter Ø mm/in.	Color	

Complete units

	Mushroom head	1	–	40/1.575	Black	ZB5AC21 (ZB5AZ101 + ZB5AC2)	0.062/0.137
--	---------------	---	---	----------	-------	---------------------------------------	-------------

Heads only

	Mushroom head			30/1.181	Black	ZB5AC24	0.027/0.060
					Green	ZB5AC34	0.027/0.060
					Red	ZB5AC44	0.027/0.060
					Yellow	ZB5AC54	0.027/0.060
					Blue	ZB5AC64	0.027/0.060
				40/1.575	Black	ZB5AC2	0.046/0.101
					Green	ZB5AC3	0.046/0.101
					Red	ZB5AC4	0.046/0.101
					Yellow	ZB5AC5	0.046/0.101
					Blue	ZB5AC6	0.046/0.101
				60/2.362	Black	ZB5AR2	0.065/0.143
					Green	ZB5AR3	0.065/0.143
					Red	ZB5AR4	0.065/0.143
					Yellow	ZB5AR5	0.065/0.143
					Blue	ZB5AR6	0.065/0.143
				60/2.362 (3) Hemispherical	Black	ZB5AR216	0.048/0.106
					Green	ZB5AR316	0.048/0.106
					Red	ZB5AR416	0.048/0.106
					Yellow	ZB5AR516	0.048/0.106
					Blue	ZB5AR616	0.048/0.106

(1) These pushbuttons and heads cannot be used for an Emergency stop function. Therefore, it is recommended that a legend with a black or white background is used.

(2) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(3) Ergonomic product used in two-handed control applications. Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head: 6.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Mushroom head pushbuttons, latching



ZB5AT2



ZB5AS62



ZB5AS72



ZB5AW733

Mushroom head pushbuttons (1) (2)

Shape of head	Type of reset	Push		Reference	Weight kg/lb
		Diameter Ø mm/in.	Color		
Heads only					
	Push-pull	30/1.181	Black	ZB5AT24	0.044/0.097
		40/1.575	Black	ZB5AT2	0.049/0.108
		60/2.362	Black	ZB5AX2	0.067/0.148
	Turn to release	30/1.181	Black	ZB5AS42	0.040/0.088
		40/1.575	Black	ZB5AS52	0.044/0.097
		40/1.575	Yellow	ZB5AS55	0.044/0.097
		60/2.362	Black	ZB5AS62	0.064/0.141
	Key release (key n° 455) (2 keys included with head) (3) (5)	30/1.181	Black	ZB5AS72	0.040/0.088
		40/1.575	Black	ZB5AS12 (4)	0.044/0.097
		60/2.362	Black	ZB5AS22	0.064/0.141

Illuminated mushroom head pushbuttons (2)

Shape of head	Type of reset	Push		Reference	Weight kg/lb
		Diameter Ø mm/in.	Color		
Heads only (6)					
	Turn to release	40/1.575	White	ZB5AW713	0.022/0.049
			Green	ZB5AW733	0.022/0.049
			Orange	ZB5AW753	0.022/0.049
			Blue	ZB5AW763	0.022/0.049

(1) These pushbuttons and heads cannot be used for an Emergency stop function. Therefore, it is recommended that a legend with a black or white background is used.

(2) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(3) For specific keys with other numbers, please consult our Customer Care Centre.

(4) Other key numbers:

- key n° 421E: add suffix **12** to the reference.

- key n° 458A: add suffix **10** to the reference.

- key n° 520E: add suffix **14** to the reference.

- key n° 3131A: add suffix **20** to the reference.

Example: To order a Ø 40 mm/1.575 in. black mushroom head for a latching pushbutton, with release by key n° 421E, the reference becomes: ZB5AS1212.

(5) The symbol indicates key withdrawal position(s).

(6) Only for use with bodies comprising a light source with integral LED.

Assembly of other products using:
body/contact assemblies: see page 40
combined sub-assemblies: see page 46
accessories: see pages 61 and 62

Control and signaling units Ø 22

Harmony XB5, plastic

Emergency stop and Emergency switching off functions

Conforming to EN/IEC 60204-1, 60364-5-53,
EN/ISO 13850 and Machinery Directive 2006/42/EC



Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.

Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.




Please consult our Customer Care Centre for a full explanation of these standards and directives.

Emergency stop and switching off pushbuttons with trigger action and mechanical latching (1) (2)




Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of reset	Type of contact		Push		Reference	Weight kg/lb
		 N/O	 N/C	Diameter Ø mm/in.	Color		

Complete units

	Push-pull	–	1	40/1.575	Red	XB5AT842 (ZB5AZ102 + ZB5AT84)	0.065/0.143
		1	1	40/1.575	Red	XB5AT845 (ZB5AZ105 + ZB5AT84)	0.076/0.168
	Turn to release	–	1	40/1.575	Red	XB5AS8442 (ZB5AZ102 + ZB5AS844)	0.060/0.132
		1	1	40/1.575	Red	XB5AS8445 (ZB5AZ105 + ZB5AS844)	0.072/0.159
	Key release (key n° 455) (3)	–	1	40/1.575	Red	XB5AS9442 (ZB5AZ102 + ZB5AS944)	0.075/0.165
		1	1	40/1.575	Red	XB5AS9445 (ZB5AZ105 + ZB5AS944)	0.112/0.247

Heads only


	Push-pull	30/1.181	Red	ZB5AT844	0.049/0.108
		40/1.575	Red	ZB5AT84	0.049/0.108
		60/2.362	Red	ZB5AX84	0.067/0.148
	Turn to release	30/1.181	Red	ZB5AS834	0.042/0.002
		40/1.575	Red	ZB5AS844	0.046/0.002
	Key release (key n° 455) (2 keys included with head) (5)(3)	30/1.181	Red	ZB5AS934	0.068/0.003
		40/1.575	Red	ZB5AS944 (4)	0.071/0.003
		60/2.362	Red	ZB5AS964	0.092/0.004
	Key release (key n° 4A185) (5)	40/1.575	Red	ZB5AS944D	0.071/0.003

Illuminated Emergency stop and Emergency switching off functions, mechanical latching pushbuttons with mechanical state indicator (1)

For elevator inspection box applications

Shape of head	Type of reset	Push Diameter Ø mm/in.	Color	Unit reference	Weight kg/lb
---------------	---------------	------------------------	-------	----------------	--------------

Heads only (6)

	Push-pull (7) For Emergency stop and Emergency switching off function	40/1.575	Red	ZB5AT8643M	0.034/0.075
---	--	----------	-----	-------------------	-------------


Illuminated Emergency switching off function only, mechanical latching pushbuttons (1) Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of reset	Push Diameter Ø mm/in.	Color	Reference	Weight kg/lb
---------------	---------------	------------------------	-------	-----------	--------------

	Turn to release	40/1.575	Red	ZB5AW743	0.022/0.049
---	-----------------	----------	-----	-----------------	-------------

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) It is recommended that a legend or yellow background is used.

(3) The symbol  indicates key withdrawal position(s).

(4) Other key numbers:

- key n° 421E: add suffix 12 to the reference.
- key n° 458A: add suffix 10 to the reference.
- key n° 520E: add suffix 14 to the reference.
- key n° 3131A: add suffix 20 to the reference.
- key n° 4A185: add suffix D to the reference.


Example: To order a Ø 40 mm/1.575 in. red mushroom head for a trigger action and mechanical latching

Emergency stop pushbutton, with release by key n° 421E, the reference becomes: ZB5AS94412.


(5) For specific keys with other numbers, please consult our Customer Care Centre.

(6) Only for use with bodies comprising a light source with integral LED.


(7) Cannot be used with metal guards ZBZ160.



XB5AT845



XB5AS8445




XB5AS9445



ZB5AT84




ZB5AS844



ZB5AS834



ZB5AS934



ZB5AT8643M

References

Assembly of other products using:
body/contact assemblies: see page 40
combined sub-assemblies: see page 46
accessories: see pages 61 and 62

Control and signaling units Ø 22

Harmony XB5, plastic

General safe stop and

Circular yellow legends for Emergency stop

General safe stops

General safe stops are used to stop the operation of a machine in a safe manner. These devices cannot be used as Emergency stop and must not be associated with a yellow background. The general safe stop are made with yellow bezel and black head.



Shape of head	Type of reset	Push		Reference	Weight kg/lb
		Diameter Ø mm/in.	Color		
	Push-pull	40/1.575	Black	ZB5AT82Y	0.050/0.110
	Turn to release	40/1.575	Black	ZB5AS842Y	0.046/0.101
	Key release (key n° 455) 2 keys included with head) (2)	40/1.575	Black	ZB5AS942Y	0.071/0.157

Circular yellow legends for Emergency stop (1)



Description	Marking	Color	Sold in lots of	Reference	Weight kg/lb
Ø 60 mm / 2.362 in. legend for Emergency stop function	-	Yellow	5	ZBY9121	0.007/0.015
	EMERGENCY STOP	Yellow	5	ZBY9320	0.007/0.015
	ARRET D'URGENCE	Yellow	5	ZBY9120	0.007/0.015
	NOT HALT	Yellow	5	ZBY9220	0.007/0.015
	PARADA DE EMERGENCIA	Yellow	5	ZBY9420	0.007/0.015
	ARRESTO DI EMERGENZA	Yellow	5	ZBY9620	0.007/0.015

Bellows for harsh environments (IP 69K) (3)

Description	Material	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
For use in environments subject to humidity, dust, high pressure cleaning, etc.	Silicone	Emergency stop/ switching off function	Yellow	2	ZBZ28	0.009/0.020
		Other functions	Black	2	ZBZ58	0.009/0.020

(1) Other legend models for Emergency stop and Emergency switching off function, see page 58 of DIA5D21212EN, Harmony XB4 catalog.

(2) The symbol indicates key withdrawal position(s).

(3) Not compatible with Ø 30 mm/1.181 in. pushbuttons.

Assembly of other products using:
 body/contact assemblies: see page 40
 combined sub-assemblies: see page 46
 accessories: see page 52



ZB5AH04

Pushbuttons with flush push (1)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
Heads only, circular				
	Without cap (2)	–	ZB5AH0	0.018/0.040
	Flush	White	ZB5AH01	0.018/0.040
		Black	ZB5AH02	0.018/0.040
		Green	ZB5AH03	0.018/0.040
		Red	ZB5AH04	0.018/0.040
		Yellow	ZB5AH05	0.018/0.040
		Blue	ZB5AH06	0.018/0.040
Heads only, square				
	Without cap (2)	–	ZB5CH0	0.020/0.044
	Flush	White	ZB5CH01	0.020/0.044
		Black	ZB5CH02	0.020/0.044
		Green	ZB5CH03	0.020/0.044
		Red	ZB5CH04	0.020/0.044
		Yellow	ZB5CH05	0.020/0.044
		Blue	ZB5CH06	0.020/0.044

Pushbuttons with projecting push (1)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
Heads only, circular				
	Projecting	White	ZB5AH1	0.018/0.040
		Black	ZB5AH2	0.018/0.040
		Green	ZB5AH3	0.018/0.040
		Red	ZB5AH4	0.018/0.040
		Yellow	ZB5AH5	0.018/0.040
		Blue	ZB5AH6	0.018/0.040

Illuminated pushbuttons with flush push (1)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
Heads only, circular (3)				
	Flush	White	ZB5AH013	0.017/0.037
		Green	ZB5AH033	0.017/0.037
		Red	ZB5AH043	0.017/0.037
		Orange	ZB5AH053	0.017/0.037
		Blue	ZB5AH063	0.017/0.037
Heads only, square (3)				
	Flush	White	ZB5CH313	0.018/0.040
		Green	ZB5CH333	0.018/0.040
		Red	ZB5CH343	0.018/0.040
		Orange	ZB5CH353	0.018/0.040
		Blue	ZB5CH363	0.018/0.040



ZB5CH343

Illuminated pushbuttons with projecting push (1)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
Heads only, circular (3)				
	Projecting	White	ZB5AH13	0.017/0.037
		Green	ZB5AH33	0.017/0.037
		Red	ZB5AH43	0.017/0.037
		Orange	ZB5AH53	0.017/0.037
		Blue	ZB5AH63	0.017/0.037

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Caps to be ordered separately, see page 52.


(3) Only for use with bodies comprising a light source with integral LED.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Pushbuttons, "push-turn to release"




ZB5AFDA

Pushbuttons with key-operated push (1)

Shape of head	Type of push	Locking	Key withdrawal	Reference	Weight kg/lb
Heads only					
	Key n° 4A185	Both positions	Both positions	ZB5AFDA	0.050/0.110
		Actuated position	Actuated position	ZB5AFDB	0.050/0.110
		Rest position	Rest position	ZB5AFDC	0.050/0.110
		Actuated position	Both positions	ZB5AFDD	0.050/0.110
	Key LU1	Both positions	Both positions	ZB5AFDE01	0.050/0.110
	Key LU2	Both positions	Both positions	ZB5AFDE02	0.050/0.110
	Key LU3	Both positions	Both positions	ZB5AFDE03	0.050/0.110
	Key LU4	Both positions	Both positions	ZB5AFDE04	0.050/0.110
	Key LU5	Both positions	Both positions	ZB5AFDE05	0.050/0.110
	Key LU6	Both positions	Both positions	ZB5AFDE06	0.050/0.110
	Key LU7	Both positions	Both positions	ZB5AFDE07	0.050/0.110
	Key LU8	Both positions	Both positions	ZB5AFDE08	0.050/0.110
	Key LU9	Both positions	Both positions	ZB5AFDE09	0.050/0.110
	Key LU10	Both positions	Both positions	ZB5AFDE10	0.050/0.110
	Key LU11	Both positions	Both positions	ZB5AFDE11	0.050/0.110
	Key LU12	Both positions	Both positions	ZB5AFDE12	0.050/0.110
	Key LU13	Both positions	Both positions	ZB5AFDE13	0.050/0.110
	Key LU14	Both positions	Both positions	ZB5AFDE14	0.050/0.110
	Key LU15	Both positions	Both positions	ZB5AFDE15	0.050/0.110

Pushbuttons with knurled push (1)

Shape of head	Type of push	Marking	Reference	Weight kg/lb
Heads only				
	Knurled without cap (2)	–	ZB5AF	0.027/0.060
	Knurled with marked cap	↑ (white on black background)	ZB5AF351	0.030/0.066

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Colored caps to be ordered separately, see page 52.



ZB5AF




ZB5AF351

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Selector switches with standard handle



XB5AD33



ZB5AD2

Selector switches with standard handle (1)								
Screw clamp terminal connections (Schneider Electric anti-loosening system)								
Shape of head	Type of operator	Type of contact		Positions		Reference	Weight kg/lb	
		N/O	N/C	Number	Type			
Complete units								
	Standard handle, black	1	–	2-position 90°	Stay put	✓	XB5AD21 (ZB5AZ101 + ZB5AD2) 0.043/0.095	
		1	–		Spring return from right to left	∩	XB5AD41 (ZB5AZ101 + ZB5AD4) 0.046/0.101	
		1	1		Stay put	✓	XB5AD25 (ZB5AZ105 + ZB5AD2) 0.043/0.095	
		2	–		3-position ± 45°	Stay put	∨	XB5AD33 (ZB5AZ103 + ZB5AD3) 0.043/0.095
						Spring return to centre	∩∩	XB5AD53 (ZB5AZ103 + ZB5AD5) 0.043/0.095
Heads only								
	Standard handle, black			2-position 90°	Stay put	✓	ZB5AD2 0.017/0.037	
					Spring return from right to left	∩	ZB5AD4 0.020/0.044	
				3-position ± 45°	Stay put	∨	ZB5AD3 0.017/0.037	
					Spring return to centre	∩∩	ZB5AD5 0.017/0.037	
					Spring return from left to centre	∩	ZB5AD7 0.017/0.037	
					Spring return from right to centre	∩	ZB5AD8 0.017/0.037	
Heads only with other colored handles								
	Standard handle, White		add suffix 01 to the reference, example: ZB5AD201					
	Standard handle, Green		add suffix 03 to the reference, example: ZB5AD203					
	Standard handle, Red		add suffix 04 to the reference, example: ZB5AD204					
	Standard handle, Yellow		add suffix 05 to the reference, example: ZB5AD205					
	Standard handle, Blue		add suffix 06 to the reference, example: ZB5AD206					

(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic


Selector switches with long handle

Selector switches with long handle ⁽¹⁾


Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of operator	Type of contact		Positions		Reference	Weight kg/lb
		N/O	N/C	Number	Type		


Complete units

	Long handle, black	1	–	2-position 90°	Stay put	✓ XB5AJ21 (ZB5AZ101 + ZB5AJ2)	0.043/0.095
		2	–	3-position ± 45°	Stay put	✓ XB5AJ33 (ZB5AZ103 + ZB5AJ3)	0.043/0.095
					Spring return to centre	✓ XB5AJ53 (ZB5AZ103 + ZB5AJ5)	0.043/0.095

Heads only

	Long handle, black			2-position 90°	Stay put	✓ ZB5AJ2	0.017/0.037
					Spring return from right to left	✓ ZB5AJ4	0.020/0.044
				3-position ± 45°	Stay put	✓ ZB5AJ3	0.017/0.037
					Spring return to centre	✓ ZB5AJ5	0.017/0.037
					Spring return from left to centre	✓ ZB5AJ7	0.017/0.037
					Spring return from right to centre	✓ ZB5AJ8	0.017/0.037

(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.



ZB5AJ3



ZB5AJ


Control and signaling units Ø 22

Harmony XB5, plastic

Key switches

Key n° 455, 8D1, 421E, 458A, 520E or 3131A

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52



XB5AG3



ZB5AG2



ZB5AG3

Key switches (1)											
Screw clamp terminal connections (Schneider Electric anti-loosening system)											
Shape of head	Type of operator	Type of contact		Positions (2)		Reference	Weight kg/lb				
		N/O	N/C	Number	Type						
Complete units											
	Key switch with key n° 455	1	-	2-position 90°	Stay put		XB5AG21 (ZB5AZ101 + ZB5AG2)	0.831/1.832			
					Spring return to left		XB5AG41 (ZB5AZ101 + ZB5AG4)	0.831/1.832			
		2	-	3-position ± 45°	Stay put		XB5AG03 (ZB5AZ103 + ZB5AG0)	0.831/1.832			
					Spring return to left		XB5AG33 (ZB5AZ103 + ZB5AG3)	0.831/1.832			
Heads only											
	Key switch with key n° 455 (3) (4)	2-position 90°	-	2-position 90°	Stay put		ZB5AG2	0.057/0.126			
					Spring return to left		ZB5AG02	0.057/0.126			
					Spring return from right to left		ZB5AG4	0.057/0.126			
					Spring return from right to left		ZB5AG6	0.061/0.134			
					3-position ± 45°	-	3-position ± 45°	Stay put		ZB5AG0	0.057/0.126
								Spring return to left to centre		ZB5AG3	0.057/0.126
		Spring return to centre		ZB5AG5				0.057/0.126			
		Spring return to centre		ZB5AG9				0.057/0.126			
		Spring return to centre		ZB5AG09				0.057/0.126			
		Spring return from left to centre		ZB5AG1				0.057/0.126			
		Spring return from right to centre	-	3-position ± 45°	Spring return to centre		ZB5AG7	0.057/0.126			
					Spring return from right to centre		ZB5AG8	0.057/0.126			
						ZB5AG05	0.057/0.126				
						ZB5AG08	0.057/0.126				

(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) The symbol indicates key withdrawal position(s).

(3) Other key numbers:

- key n° 421E: add suffix 12 to the reference.
- key n° 458A: add suffix 10 to the reference.
- key n° 520E: add suffix 14 to the reference.
- key n° 3131A: add suffix 20 to the reference.

Example: For a switch head with key n° 421E, 2-position stay put with key withdrawal from the left-hand position, the reference becomes: ZB5AG212.

(4) For specific keys with other numbers, please consult our Customer Care Centre.

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22




















Harmony XB5, plastic

Key switches with key 8D1








Selector switches with knurled knob - Toggle switches

Key switches (continued) (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of operator	Positions (2)	Type	Reference	Weight kg/lb	
	Key switch with key n° 8D1	2-position 90°	Stay put	 ZB5AG2D	0.057/0.126	
				 ZB5AG02D	0.057/0.126	
				 ZB5AG4D	0.057/0.126	
		Spring return from right to left	Stay put	90°	 ZB5AG6D	0.061/0.134
					 ZB5AG0D	0.057/0.126
					 ZB5AG3D	0.057/0.126
		3-position ± 45°	Stay put	± 45°	 ZB5AG5D	0.057/0.126
					 ZB5AG9D	0.057/0.126
					 ZB5AG09D	0.057/0.126
		Spring return from left to centre	Stay put	± 45°	 ZB5AG03D	0.057/0.126
					 ZB5AG04D	0.057/0.126
					 ZB5AG06D	0.057/0.126
		Spring return from right to centre	Stay put	± 45°	 ZB5AG1D	0.057/0.126
					 ZB5AG07D	0.057/0.126
					 ZB5AG8D	0.057/0.126
Spring return to centre	Stay put	± 45°	 ZB5AG08D	0.057/0.126		
			 ZB5AG05D	0.057/0.126		
			 ZB5AG7D	0.057/0.126		







Selector switches with knurled knob (1)

Shape of head	Type of operator	Positions (2)	Type	Reference	Weight kg/lb	
Heads only						
	Black knurled knob	2-position 90°	Stay put	 ZB5AD29	0.020/0.044	
				 ZB5AD49	0.024/0.053	
		3-position ± 45°	Stay put	± 45°	 ZB5AD39	0.020/0.044
					 ZB5AD59	0.020/0.044
					 ZB5AD79	0.020/0.044
					 ZB5AD89	0.020/0.044



ZB5AD39


Toggle switches (1)

Shape of head	Type of operator	Positions (2)	Type	Reference	Weight kg/lb
Heads only					
	Black lever	2-position 90°	Stay put	 ZB5AD28	0.023/0.051
				 ZB5AD48	0.023/0.051
	White lever	2-position 90°	Stay put	 ZB5AD2801	0.023/0.051
	Red lever	2-position 90°	Stay put	 ZB5AD2804	0.023/0.051
	Blue lever	2-position 90°	Stay put	 ZB5AD2806	0.023/0.051



ZB5AD28

(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) The symbol  indicates key withdrawal position(s)

Assembly of other products using:
combined sub-assemblies: see page 46
accessories: see page 52



Control and signaling units Ø 22

Harmony XB5, plastic




Illuminated selector switches with standard handle,
with integral LED

Illuminated selector switches with standard handle, with integral LED ⁽¹⁾

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of operator	Type of contact	Positions Number and Type	Supply voltage V	Color of handle	Reference	Weight kg/lb
							
		N/O	N/C				

Complete units

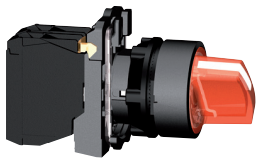 PF100206 XB5AK123B5		Standard handle	1	1	2-position 90° Stay put	 24 (50/60 Hz)	Green	XB5AK123B5 (ZB5AW0B35 + ZB5AK1233)	0.516/1.138							
							Red	XB5AK124B5 (ZB5AW0B45 + ZB5AK1243)	0.516/1.138							
							Orange	XB5AK125B5 (ZB5AW0B55 + ZB5AK1253)	0.516/1.138							
							 PF106209 XB5AK124B5		Standard handle	1	1	2-position 90° Stay put	 110...120 (50/60 Hz)	Green	XB5AK123G5 (ZB5AW0G35 + ZB5AK1233)	0.516/1.138
														Red	XB5AK124G5 (ZB5AW0G45 + ZB5AK1243)	0.516/1.138
														Orange	XB5AK125G5 (ZB5AW0G55 + ZB5AK1253)	0.516/1.138
							 107763 XB5AK125B5		Standard handle	1	1	2-position 90° Stay put	 230...240 (50/60 Hz)	Green	XB5AK123M5 (ZB5AW0M35 + ZB5AK1233)	0.516/1.138
														Red	XB5AK124M5 (ZB5AW0M45 + ZB5AK1243)	0.516/1.138
														Orange	XB5AK125M5 (ZB5AW0M55 + ZB5AK1253)	0.516/1.138
 107763 XB5AK133B5		Standard handle	1	1	3-position ± 45° Stay put	 24 (50/60 Hz)								Green	XB5AK133B5 (ZB5AW0B35 + ZB5AK1333)	0.516/1.138
														Red	XB5AK134B5 (ZB5AW0B45 + ZB5AK1343)	0.516/1.138
														Orange	XB5AK135B5 (ZB5AW0B55 + ZB5AK1353)	0.516/1.138
 107763 XB5AK133G5		Standard handle	1	1	3-position ± 45° Stay put	 110...120 (50/60 Hz)	Green	XB5AK133G5 (ZB5AW0G35 + ZB5AK1333)	0.516/1.138							
							Red	XB5AK134G5 (ZB5AW0G45 + ZB5AK1343)	0.516/1.138							
							Orange	XB5AK135G5 (ZB5AW0G55 + ZB5AK1353)	0.516/1.138							
 107763 XB5AK133M5		Standard handle	1	1	3-position ± 45° Stay put	 230...240 (50/60 Hz)	Green	XB5AK133M5 (ZB5AW0M35 + ZB5AK1333)	0.516/1.138							
							Red	XB5AK134M5 (ZB5AW0M45 + ZB5AK1343)	0.516/1.138							
							Orange	XB5AK135M5 (ZB5AW0M55 + ZB5AK1353)	0.516/1.138							

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

Assembly of other products using:
combined sub-assemblies: see page 46
accessories: see page 52



Control and signaling units Ø 22

Harmony XB5, plastic

Illuminated selector switches with standard handle,
with integral LED

Illuminated selector switches with standard handle, with integral LED

(continued) (1)

Shape of head	Type of operator	Positions Number	Type		Color of handle	Reference	Weight kg/lb		
Heads only (2)									
	Standard handle	2-position 90°	Stay put	↙	White	ZB5AK1213	0.016/0.035		
					Green	ZB5AK1233	0.016/0.035		
					Red	ZB5AK1243	0.016/0.035		
					Orange	ZB5AK1253	0.016/0.035		
					Blue	ZB5AK1263	0.016/0.035		
					Spring return from right to left	↘	White	ZB5AK1413	0.017/0.037
							Green	ZB5AK1433	0.017/0.037
							Red	ZB5AK1443	0.017/0.037
							Orange	ZB5AK1453	0.017/0.037
							Blue	ZB5AK1463	0.017/0.037
	Standard handle	3-position ± 45°	Stay put	↘	White	ZB5AK1313	0.016/0.035		
					Green	ZB5AK1333	0.016/0.035		
					Red	ZB5AK1343	0.016/0.035		
					Orange	ZB5AK1353	0.016/0.035		
					Blue	ZB5AK1363	0.016/0.035		
					Spring return to centre	↕	White	ZB5AK1513	0.016/0.035
							Green	ZB5AK1533	0.016/0.035
							Red	ZB5AK1543	0.016/0.035
							Orange	ZB5AK1553	0.016/0.035
							Blue	ZB5AK1563	0.016/0.035
Spring return from right to centre	↘↕	White	ZB5AK1813	0.016/0.035					
		Green	ZB5AK1833	0.016/0.035					
		Red	ZB5AK1843	0.016/0.035					
		Orange	ZB5AK1853	0.016/0.035					
		Blue	ZB5AK1863	0.016/0.035					
Spring return from left to centre	↙↕	White	ZB5AK1713	0.016/0.035					
		Green	ZB5AK1733	0.016/0.035					
		Red	ZB5AK1743	0.016/0.035					
		Orange	ZB5AK1753	0.016/0.035					
		Blue	ZB5AK1763	0.016/0.035					

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Only for use with bodies comprising a light source with integral LED.

Assembly of other products using:
light block sub-assemblies: see page 48
accessories: see page 52

Control and signaling units Ø 22


Harmony XB5, plastic

Pilot lights with integral LED






Pilot lights with integral LED


Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Supply voltage V	Color	Reference for monolithic units	Reference for complete units	Weight kg/lb	
Complete units (With plain lens)						
	~ 24 (50/60 Hz)	White	XB5EVB1	XB5AVB1 (ZB5AVB1 + ZB5AV013)	0.038/0.084	
		Green	XB5EVB3	XB5AVB3 (ZB5AVB3 + ZB5AV033)	0.038/0.084	
		Red	XB5EVB4	XB5AVB4 (ZB5AVB4 + ZB5AV043)	0.038/0.084	
		Orange	XB5EVB5	XB5AVB5 (ZB5AVB5 + ZB5AV053)	0.038/0.084	
		Blue	XB5EVB6	XB5AVB6 (ZB5AVB6 + ZB5AV063)	0.038/0.084	
		Yellow	XB5EVB8	–	0.038/0.084	
		~ 110...120 (50/60 Hz)	White	XB5EVG1	XB5AVG1 (ZB5AVG1 + ZB5AV013)	0.038/0.084
			Green	XB5EVG3	XB5AVG3 (ZB5AVG3 + ZB5AV033)	0.038/0.084
Red	XB5EVG4		XB5AVG4 (ZB5AVG4 + ZB5AV043)	0.038/0.084		
Orange	XB5EVG5		XB5AVG5 (ZB5AVG5 + ZB5AV053)	0.038/0.084		
Blue	XB5EVG6		XB5AVG6 (ZB5AVG6 + ZB5AV063)	0.038/0.084		
Yellow	XB5EVG8		–	0.038/0.084		
~ 230...240 (50/60 Hz)	White		XB5EVM1	XB5AVM1 (ZB5AVM1 + ZB5AV013)	0.038/0.084	
	Green		XB5EVM3	XB5AVM3 (ZB5AVM3 + ZB5AV033)	0.038/0.084	
	Red	XB5EVM4	XB5AVM4 (ZB5AVM4 + ZB5AV043)	0.038/0.084		
	Orange	XB5EVM5	XB5AVM5 (ZB5AVM5 + ZB5AV053)	0.038/0.084		
	Blue	XB5EVM6	XB5AVM6 (ZB5AVM6 + ZB5AV063)	0.038/0.084		
	Yellow	XB5EVM8	–	0.038/0.084		

Heads only, circular (1)

Shape of head	For use with body comprising light source type	Color of lens	Reference	Weight kg/lb
■ With plain lens				
	Integral LED only	White	ZB5AV013	0.017/0.037
		Green	ZB5AV033	0.017/0.037
		Red	ZB5AV043	0.017/0.037
		Orange	ZB5AV053	0.017/0.037
		Blue	ZB5AV063	0.017/0.037
		5 colors (2) (3)	ZB5AV003	0.017/0.037
■ With plain lens, for insertion of legend (3)				
	Integral LED only	White	ZB5AV013E	0.017/0.037
		Green	ZB5AV033E	0.017/0.037
		Red	ZB5AV043E	0.017/0.037
		Orange	ZB5AV053E	0.017/0.037
		Blue	ZB5AV063E	0.017/0.037
■ With grooved lens (4)				
	Integral LED only	White	ZB5AV013S	0.017/0.037
		Green	ZB5AV033S	0.017/0.037
		Red	ZB5AV043S	0.017/0.037
		Orange	ZB5AV053S	0.017/0.037
		Blue	ZB5AV063S	0.017/0.037

Heads only, square (1)

■ With plain lens				
	Integral LED only	White	ZB5CV013	0.020/0.044
		Green	ZB5CV033	0.020/0.044
		Red	ZB5CV043	0.020/0.044
		Orange	ZB5CV053	0.020/0.044
		Blue	ZB5CV063	0.020/0.044
		5 colors (2)	ZB5CV003	0.028/0.062

(1) Only for use with bodies comprising a light source with integral LED.

(2) Head supplied with 5 different colored lenses (white, green, red, orange, or blue) not fitted, for insertion of legend.

(3) For legend ordering information, see page 61.

(4) For use in bright ambient light conditions (for example, outdoors in sunlight).

Assembly of other products using:
light block sub-assemblies: see page 48
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Pilot lights with integral LED and with BA 9s base fitting



XB5AV5B4



XB5AV63




XB5AV34



ZB5AV01


Pilot lights with integral LED and transformer (1.2 VA, 24 V secondary)

Screw clamp terminal connections (Schneider Electric anti-loosening system)



Shape of head	Supply voltage V	Color	Reference (1)	Weight kg/lb
	~ 400 - 50 Hz (1)	White	XB5AV5B1	0.133/0.293
		Green	XB5AV5B3	0.133/0.293
		Red	XB5AV5B4	0.133/0.293
		Orange	XB5AV5B5	0.133/0.293
		Blue	XB5AV5B6	0.133/0.293
		Complete units - With plain lens		

Pilot lights with BA 9s base fitting, with plain or grooved lens

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Supply voltage V	Color	Reference	Weight kg/lb
	≤ 250	White	XB5AV61 (ZB5AV6 + ZB5AV01)	0.037/0.082
		Green	XB5AV63 (ZB5AV6 + ZB5AV03)	0.037/0.082
		Red	XB5AV64 (ZB5AV6 + ZB5AV04)	0.037/0.082
		Orange	XB5AV65 (ZB5AV6 + ZB5AV05)	0.037/0.082
	~ 110...120 - 50/60 Hz	White	XB5AV31 (ZB5AV3 + ZB5AV01)	0.109/0.240
		Green	XB5AV33 (ZB5AV3 + ZB5AV03)	0.109/0.240
		Red	XB5AV34 (ZB5AV3 + ZB5AV04)	0.109/0.240
		Orange	XB5AV35 (ZB5AV3 + ZB5AV05)	0.109/0.240
		White	XB5AV41 (ZB5AV4 + ZB5AV01)	0.110/0.243
		Green	XB5AV43 (ZB5AV4 + ZB5AV03)	0.110/0.243
		Red	XB5AV44 (ZB5AV4 + ZB5AV04)	0.110/0.243
		Orange	XB5AV45 (ZB5AV4 + ZB5AV05)	0.110/0.243
Complete units - With plain lens				
■ Direct supply, for BA 9s bulb, U ≤ 250 V, 2.4 W max (bulb not included)				
■ Via integral transformer, 1.2 VA, 6 V secondary, with BA 9s incandescent bulb (included)				

Heads only (2)

Shape of head	For use with body comprising light source type	Color of lens	Reference	Weight kg/lb
	With BA 9s base fitting	White	ZB5AV01	0.018/0.040
		Green	ZB5AV03	0.018/0.040
		Red	ZB5AV04	0.018/0.040
		Orange	ZB5AV05	0.018/0.040
		Blue	ZB5AV06	0.018/0.040
		Clear	ZB5AV07	0.018/0.040
			With BA 9s base fitting	White
Green	ZB5AV03S			0.017/0.037
Red	ZB5AV04S			0.017/0.037
Orange	ZB5AV05S			0.017/0.037
Blue	ZB5AV06S			0.017/0.037
Clear	ZB5AV07S			0.017/0.037

(1) For order ~ 440...460 V - 60 Hz transformer blocks, please replace "5" in the reference by "8". Example: XB5AV5B1 becomes XB5AV8B1. To order ~ 550...600 V - 60 Hz blocks, please replace "5" by "9". Example: XB5AV5B1 becomes XB5AV9B1.

(2) Only for use with bodies comprising a light source with BA 9s base fitting (incandescent, neon or LED).

(3) For use in bright ambient light conditions (for example, outdoors in sunlight).

Assembly of other products using:
body/contact assemblies: see page 40
accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Specific functions

Pushbuttons for manual overload reset, hour counters, buzzers, fuse carrier



XB5AA801

Manual overload reset buttons (travel 10 mm/0.349 in.)

Shape of head	Actuation distance mm/in.	Marking	Color	Reference	Weight kg/lb
Without cap (1)					
	17...120 /0.669...4.724	–	–	XB5AA801	0.027/0.060
	120...257 /4.724...10.118	–	–	XB5AA802	0.040/0.088
With flush push					
	17...120 /0.669...4.724	Without	Green	XB5AA831	0.027/0.060
			Red	XB5AA841	0.027/0.060
			Blue	XB5AA861	0.027/0.060
		O	Red	XB5AA84101	0.027/0.060
			Blue	XB5AA86102	0.027/0.060
			R	Blue	XB5AA86102
	120...257 /4.724...10.118	Without	Green	XB5AA832	0.040/0.088
			Red	XB5AA842	0.040/0.088
			Blue	XB5AA862	0.040/0.088
		O	Red	XB5AA84201	0.040/0.088
			Blue	XB5AA86202	0.040/0.088
			R	Blue	XB5AA86202
With projecting push					
	17...120 /0.669...4.724	O	Red	XB5AL84101	0.027/0.060
	120...257 /4.724...10.118	O	Red	XB5AL84201	0.040/0.088



ZB5AD...

Heads and mounting base for potentiometer (2)

Shape of head	Description	For use with	Reference	Weight kg/lb
	For potentiometer with shaft length 45 to 50 mm /1.772 to 1.968 in.	Ø 6 mm /0.236 in. shaft	ZB5AD912	0.032/0.071
		Ø 6.35 mm /0.250 in. shaft	ZB5AD922	0.032/0.071



XB5DSB

Hour counters

Characteristics	Supply voltage V	Reference	Weight kg/lb
Indication 0...9999.9	≈ 12...24 - 50 or 60 Hz	XB5DSB	0.045/0.099
	~ 120 - 60 Hz	XB5DSG	0.045/0.099
	~ 230...240 - 50 Hz	XB5DSM	0.045/0.099



XB5KSB

Annunciators (IP 40 NEMA 1)

85 db buzzer: 4 kHz, with continuous or intermittent operation (connection diagram: on Schneider Electric website, Harmony XB5 page)	≈ 24 - 50 or 60 Hz	XB5KSB	0.035/0.077
	~ 120 - 50 or 60 Hz	XB5KSG	0.035/0.077
	~ 230...240 - 50 Hz	XB5KSM	0.035/0.077



XB5DT1S

Fuse carrier

Description	For use with	Reference	Weight kg/lb
Fuse carrier	5 x 20 mm/0.197 x 0.787 in. fuse 6.3 A - 250 V	XB5DT1S	0.022/0.049

(1) Colored cap to be ordered separately, see page 52.
(2) Potentiometer not included.


Assembly of other products using accessories: see page 52

Control and signaling units Ø 22

Harmony XB5, plastic

Specific functions


Joystick controllers

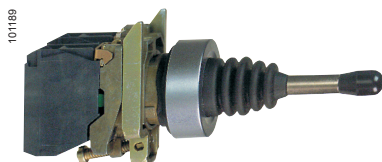

XB5PA12



ZD5PA103



ZD5PA203



ZD5PA12

Joystick controllers (with 54 mm/2.126 in. long operating shaft) (1) Screw clamp terminal connections (Schneider Electric anti-loosening system)

Description	Operation	Spring return to zero position	Reference	Weight kg/lb
Complete products				
2-direction	1 notch 1 N/O contact per direction	Without	XD5PA12	0.060/0.132
		With	XD5PA22	0.060/0.132
4-direction	1 notch 1 N/O contact per direction	Without	XD5PA14	0.077/0.170
		With	XD5PA24	0.077/0.170

Sub-assemblies for joystick controllers

Description	For use with	Reference	Weight kg/lb	
Complete body/contact assemblies	2-direction	ZD5PA103	0.049/0.108	
	4-direction	ZD5PA203	0.058/0.128	
Complete head assemblies with operating shaft	2-direction, stay put	ZD5PA12	0.022/0.049	
	2-direction, spring return to zero position	ZD5PA22	0.022/0.049	
	4-direction, stay put	ZD5PA14	0.022/0.049	
	4-direction, spring return to zero position	ZD5PA24	0.022/0.049	
Legends 30 x 48 mm /1.181 x 1.890 in. for engraving	2-direction	Black one side Red reverse	ZBG2201	0.001/0.002
		White one side Yellow reverse	ZBG2401	0.001/0.002
Legends 48 x 48 mm /1.890 x 1.890 in. for engraving	4-direction	Black one side Red reverse	ZBG4201	0.002/0.004
		White one side Yellow reverse	ZBG4401	0.002/0.004

Other versions Joystick controllers and complete body/contact assemblies for joystick controllers with Faston connector terminals (6.35 or 2 x 2.8/0.250 or 2 x 0.110 in.) Please consult our Customer Care Centre.

(1) Must not be used with standard contact blocks ZBE10● (single) or ZBE20● (double).

To combine with heads, see pages 14 to 38

Control and signaling units Ø 22

Harmony XB5, plastic


Body/contact assemblies - Screw clamp terminal connections



ZB5AZ009




ZBE101



ZBE203




ZB5AZ101




ZBE201




ZB5AZ107



ZBE501



ZB2BE101



ZBZ001

Body/fixing collar

For use with	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	10	ZB5AZ009	0.006/0.013

Contact functions (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Application	Type of contact	Description			Sold in lots of	Unit reference	Weight kg/lb
			N/O	N/C			

Contacts for standard applications

Contact blocks	Single	Double	Single with body/fixing collar					
Contact blocks	Standard			1	–	5	ZBE101	0.011/0.024
				–	1	5	ZBE102	0.011/0.024
				2	–	5	ZBE203	0.020/0.044
				–	2	5	ZBE204	0.020/0.044
				1	1	5	ZBE205	0.020/0.044
				1	–	1	ZB5AZ101	0.021/0.046
				–	1	1	ZB5AZ102	0.021/0.046
				2	–	1	ZB5AZ103	0.030/0.066
				–	2	1	ZB5AZ104	0.030/0.066
				1	1	1	ZB5AZ105	0.030/0.066
			1	2	1	ZB5AZ141	0.040/0.088	

Contacts for specific applications

Low power switching	Single	Standard							
Low power switching	Single	Standard		1	–	5	ZBE1016	0.012/0.026	
				–	1	5	ZBE1026	0.012/0.026	
		Dusty environment (2) (IP 5X, 50 µm dust)		1	–	5	ZBE1016P	0.012/0.026	
				–	1	5	ZBE1026P	0.012/0.026	
Staggered contacts	Single	Early make N/O		1	–	5	ZBE201	0.011/0.024	
			Late break N/C		–	1	5	ZBE202	0.011/0.024
		Single with body/fixing collar	Overlapping N/O+N/C		1	1	5	ZB4BZ106	0.062/0.137
			Staggered N/O+N/O		2	–	5	ZB4BZ107	0.062/0.137
High power switching	Single	Standard (3)		1	–	1	ZBE501	0.020/0.044	
				–	1	1	ZBE502	0.020/0.044	
				2	–	1	ZBE503	0.032/0.071	
				–	2	1	ZBE504	0.032/0.071	
				1	1	1	ZBE505	0.032/0.071	
				1	–	1	ZB2BE101	0.020/0.044	
Additional contact blocks for high power switching	Single	Standard (4)		–	1	1	ZB2BE102	0.020/0.044	

Clip-on legend holder, sheet of blank legends and labelling software

Description	Sold in lots of	Unit reference	Weight kg/lb
Clip-on legend-holder for electrical blocks with screw clamp terminal connections(5). For identification of an XB4B control or signaling unit	10	ZBZ001	0.001/0.002
Sheet of 50 blank legends for legend holder ZBZ001	10	ZBY001	0.023/0.051
"SIS Label" labelling software for legend design (ZBY001 legends) (for design of legends in English, French, German, Italian, Spanish)	1	XBY2U	0.100/0.220

(1) The contact blocks enable variable composition of body/contact assemblies. Maximum number of rows possible: 3. Either 3 rows of 3 single contacts or 1 row of 3 double contacts + 1 row of 3 single contacts (double contacts occupy the first 2 rows). Maximum number of contacts is specified on page 12 of this catalog.
 (2) It is not possible to fit an additional contact block on the back of these contact blocks.
 (3) It is not possible to fit an additional contact block on the back of these contact blocks or to use these contacts with light blocks.
 (4) To be fitted on the back of ZBE50● contacts.
 (5) This legend holder is not compatible with high power switching contacts.

To combine with heads,
see page 19



ZBVB1



ZBV5B



ZBZG156



ZBZM156



ZBZVG

Light blocks

Description	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Light blocks with screw clamp terminal connections (Schneider Electric anti-loosening system)					
Integral LED (to combine with heads for integral LED)	~ 12 (50 or 60 Hz)	White	5	ZBVJ1	0.017/0.037
		Green	5	ZBVJ3	0.017/0.037
		Red	5	ZBVJ4	0.017/0.037
		Orange	5	ZBVJ5	0.017/0.037
		Blue	5	ZBVJ6	0.017/0.037
		~ 24 (50 or 60 Hz)	White	5	ZBVB1
	Green	5	ZBVB3	0.017/0.037	
	Red	5	ZBVB4	0.017/0.037	
	Orange	5	ZBVB5	0.017/0.037	
	Blue	5	ZBVB6	0.017/0.037	
	~ 24...120 (50 or 60 Hz)	White	5	ZBVBG1	0.017/0.037
		Green	5	ZBVBG3	0.017/0.037
		Red	5	ZBVBG4	0.017/0.037
		Orange	5	ZBVBG5	0.017/0.037
		Blue	5	ZBVBG6	0.017/0.037
		~ 110...120 (50 or 60 Hz)	White	5	ZBVG1
	Green		5	ZBVG3	0.017/0.037
	Red		5	ZBVG4	0.017/0.037
	Orange		5	ZBVG5	0.017/0.037
	Blue		5	ZBVG6	0.017/0.037
	~ 230...240 (50 or 60 Hz)		White	5	ZBVM1
		Green	5	ZBVM3	0.017/0.037
		Red	5	ZBVM4	0.017/0.037
		Orange	5	ZBVM5	0.017/0.037
Blue		5	ZBVM6	0.017/0.037	

Flashing light blocks with screw clamp terminal connections

(Schneider Electric anti-loosening system)

Description	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	~ 24 (50 or 60 Hz)	White	5	ZBV18B1	0.017/0.037
		Green	5	ZBV18B3	0.017/0.037
		Red	5	ZBV18B4	0.017/0.037
		Orange	5	ZBV18B5	0.017/0.037
		Blue	5	ZBV18B6	0.017/0.037
		~ 110...120 (50 or 60 Hz)	White	5	ZBV18G1
	Green		5	ZBV18G3	0.017/0.037
	Red		5	ZBV18G4	0.017/0.037
	Orange		5	ZBV18G5	0.017/0.037
	Blue		5	ZBV18G6	0.017/0.037
	~ 230...240 (50 or 60 Hz)		White	5	ZBV18M1
		Green	5	ZBV18M3	0.017/0.037
		Red	5	ZBV18M4	0.017/0.037
		Orange	5	ZBV18M5	0.017/0.037
		Blue	5	ZBV18M6	0.017/0.037

For use with	Supply voltage V	Description	Reference	Weight kg/lb
Transformer blocks for 24 V light blocks (1)				
Light blocks with integral LED	~ 400 V - 50Hz	Transformer 400 V - 24 V ~	ZBV5B (2)	0.090/0.198
Blocks for "test light" function				
Light blocks	~ 12 and 24 ~ 24...120	Single module, 1 connecting wire	ZBZG156 (3)	0.010/0.022
Light blocks with integral LED	~ 48...230	Double module, with connecting wires	ZBZM156 (4)	0.010/0.022

LED suppressors

For use with	Supply voltage V	Level of protection	Reference	Weight kg/lb
Light blocks with integral LED fitted with screw clamp terminal connections	~ 120	25...120 VA	ZBZVG	0.010/0.022
	~ 230	30...230 VA	ZBZVM	0.010/0.022

(1) To be used with 2 dummy contact blocks ZBE000.

(2) To order ~ 440...460 V - 60 Hz transformer blocks, please replace "5" in the reference by "8": ZBV5B becomes ZBV8B. To order ~ 550...600 V - 60 Hz transformer blocks, please replace "5" by "9": ZBV5B becomes ZBV9B.

(3) Block for use with ~ light blocks with integral LED types ZBVJ●, ZBVB●, ZBVBG● or with direct supply light block for BA 9s bulb, ZBV6.

(4) Block for use ~ light blocks integral LED types ZBVG●, ZBVM●, see connection on Schneider Electric website, Harmony XB5 page.

To combine with heads, see pages 14 to 38

814588



ZB5AZ009

Body/fixing collar

For use with	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	10	ZB5AZ009	0.006/0.013

PF10777





ZBE1015

Contact functions

Spring clamp terminal connections (1)

Contacts for standard applications

Description	Type of contact			Sold in lots of	Unit reference	Weight kg/lb
Contact blocks	Single	1	–	4	ZBE1015	0.011/0.024
		–	1	4	ZBE1025	0.011/0.024
Contact blocks	Single with body/fixing collar	1	–	1	ZB5AZ1015	0.021/0.046
		–	1	1	ZB5AZ1025	0.021/0.046
		2	–	1	ZB5AZ1035	0.030/0.066
		–	2	1	ZB5AZ1045	0.030/0.066
		1	1	1	ZB5AZ1055	0.030/0.066

PF10778



ZB5AZ1015

Light blocks

Spring clamp terminal connections (1)

Description	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	~ 12 (50 or 60 Hz)	White	4	ZBVJ15	0.016/0.035
		Green	4	ZBVJ35	0.016/0.035
		Red	4	ZBVJ45	0.016/0.035
		Orange	4	ZBVJ55	0.016/0.035
		Blue	4	ZBVJ65	0.016/0.035
Integral LED (to combine with heads for integral LED)	~ 24 (50 or 60 Hz)	White	4	ZBVB15	0.016/0.035
		Green	4	ZBVB35	0.016/0.035
		Red	4	ZBVB45	0.016/0.035
		Orange	4	ZBVB55	0.016/0.035
		Blue	4	ZBVB65	0.016/0.035
Integral LED (to combine with heads for integral LED)	~ 110...120 (50 or 60 Hz)	White	4	ZBVG15	0.016/0.035
		Green	4	ZBVG35	0.016/0.035
		Red	4	ZBVG45	0.016/0.035
		Orange	4	ZBVG55	0.016/0.035
		Blue	4	ZBVG65	0.016/0.035
Integral LED (to combine with heads for integral LED)	~ 230...240 (50 or 60 Hz)	White	4	ZBVM15	0.016/0.035
		Green	4	ZBVM35	0.016/0.035
		Red	4	ZBVM45	0.016/0.035
		Orange	4	ZBVM55	0.016/0.035
		Blue	4	ZBVM65	0.016/0.035


Protected LED

PF08071



ZBVB35

814282



ZBZ001

Sheet of 50 blank legends

For use with	Sold in lots of	Unit reference	Weight kg/lb
Legend holder ZBZ001	10	ZBY001	0.023/0.051

"SIS Label" labelling software (for legends ZBY001)

For legend design	Sold in lots of	Unit reference	Weight kg/lb
for English, French, German, Italian, Spanish	1	XBY2U	0.038/0.084

540548



XBY2U

(1) It is not possible to fit an additional block on the back of these contact or light blocks.

To combine with heads,
see pages 14 to 38

814588




ZB5AZ009

DF540919



ZB5AZ079 + ZB5AZ009

101303



ZBZ011

101259



ZBE701

101280



ZBE702

PF512550



ZBVB37

Body/fixing collar and accessories specifically for printed circuit board mounting (1)

Accessories required when using adaptor (socket) ZBZ010

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Body/fixing collar	Electrical block (contact or light)	10	ZB5AZ009	0.006/0.013
Fixing collar/pillar	Printed circuit board support (fixing screw ZBZ006 to be ordered separately)	10	ZB5AZ079	0.003/0.007
Fixing screw for printed circuit board	Fixing collar/pillar ZB5AZ079	10	ZBZ006	0.011/0.024

Adapter (socket) (1)

For use with	Thickness of printed circuit board mm/in.	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	1.6 ± 0.2/0.063 ± 0.008	10	ZBZ010	0.008/0.018
	2.2 ± 0.2/0.087 ± 0.008	10	ZBZ011	0.008/0.018
	3.2 ± 0.2/0.126 ± 0.008	10	ZBZ012	0.008/0.018

Contact functions (1)

Contacts for standard applications

Description	Type of contact	N/O	N/C	Sold in lots of	Unit reference	Weight kg/lb
Contact blocks	Single	1	–	5	ZBE701	0.011/0.024
		–	1	5	ZBE702	0.011/0.024

Contacts for specific applications

Application	Type of contact	N/O	N/C	Sold in lots of	Unit reference	Weight kg/lb
Low power switching	Single	1	–	5	ZBE7016	0.012/0.026
		–	1	5	ZBE7026	0.012/0.026

Light blocks (1)

Description	Supply voltage V	Color of LED	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	≈ 24 (50 or 60 Hz)	White	5	ZBVB17	0.004/0.009
		Green	5	ZBVB37	0.004/0.009
		Red	5	ZBVB47	0.004/0.009
		Orange	5	ZBVB57	0.004/0.009
		Blue	5	ZBVB67	0.004/0.009

Protected LED

(1) For details on support drilling and printed circuit board, refer to Schneider Electric website, Harmony XB5 page.


To combine with heads, see pages 14 to 38




ZBE1023




ZBE2043



ZBE5043



ZBZ001



XBY2U

Contact functions (1) Faston connectors (6.35 or 2 x 2.8 mm/0.250 or 2 x 0.110 in.)

Contacts for standard applications

Description	Type of contact	Symbol		Sold in lots of	Unit reference	Weight kg/lb
		N/O	N/C			
Contact blocks	Single	1	–	5	ZBE1013	0.011/0.024
		–	1	5	ZBE1023	0.011/0.024
	Double	2	–	5	ZBE2033	0.020/0.044
		–	2	5	ZBE2043	0.020/0.044
		1	1	5	ZBE2053	0.020/0.044
Single with body/fixing collar	1	–	1	ZB5AZ1013 (2)	0.021/0.046	
	–	1	1	ZB5AZ1023 (2)	0.021/0.046	
	2	–	1	ZB5AZ1033	0.030/0.066	
	–	2	1	ZB5AZ1043	0.030/0.066	
	1	1	1	ZB5AZ1053	0.030/0.066	

Contacts for specific applications

Application	Type of contact	Description	Symbol		Sold in lots of	Unit reference	Weight kg/lb
			N/O	N/C			
Low power switching	Single	Standard	1	–	5	ZBE10163 (2)	0.012/0.026
			–	1	5	ZBE10263 (2)	0.012/0.026
		Dusty environments (3) (IP 5X, 50 µm dust)	1	–	5	ZBE1016P3 (2)	0.012/0.026
			–	1	5	ZBE1026P3 (2)	0.012/0.026
Staggered contacts	Single	Early make	1	–	5	ZBE2013 (2)	0.011/0.024
		N/O	–	1	5	ZBE2023 (2)	0.011/0.024
		Late break	–	1	5	ZBE2023 (2)	0.011/0.024
High power switching	Single	Standard (4)	1	–	1	ZBE5013	0.021/0.046
			–	1	1	ZBE5023	0.021/0.046
			2	–	1	ZBE5033	0.033/0.073
			–	2	1	ZBE5043	0.033/0.073
			1	1	1	ZBE5053	0.033/0.073

Clip-on legend holder for electrical blocks with screw clamp terminal connections (5)

For use with	Sold in lots of	Unit reference	Weight kg/lb
Identification of an XB5A control or signaling unit	10	ZBZ001	0.001/0.002

Sheet of 50 blank legends

Legend holder ZBZ001	10	ZBY001	0.023/0.051
----------------------	----	--------	-------------

“SIS Label” labelling software (for legends ZBY001)

For legend design for English, French, German, Italian, Spanish	1	XBY2U	0.100/0.220
---	---	-------	-------------

- (1) The contact blocks enable variable composition of body/contact assemblies. Maximum number of rows possible: 3. Either 3 rows of 3 single contacts or 1 row of 3 double contacts + 1 row of 3 single contacts (double contacts occupy the first 2 rows).
- (2) To order products with screw clamp terminal connections for lugs, replace the 3 at the end of the reference with a 9. Example: ZBE1013 becomes ZBE1019.
- (3) It is not possible to fit an additional contact block on the back of these contact blocks.
- (4) It is not possible to use these contacts with light blocks.
- (5) This legend holder is not compatible with high power switching contacts.

To combine with heads,
see pages 14 to 38



ZB5AZ009



ZBE1014




ZBE1024



ZB5AZ1024



ZBVB14



APE1C2250

Body/fixing collar

For use with	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	10	ZB5AZ009	0.006/0.013

Contact functions

Plug-in connector (1)

Contacts for standard applications

Description	Type of contact			Sold in lots of	Unit reference	Weight kg/lb
		N/O	N/C			
Contact blocks	Single	1	–	5	ZBE1014	0.011/0.024
		–	1	5	ZBE1024	0.011/0.024
	Single with body/fixing collar	1	–	1	ZB5AZ1014	0.018/0.040
		–	1	1	ZB5AZ1024	0.018/0.040
		2	–	1	ZB5AZ1034	0.026/0.057
		–	2	1	ZB5AZ1044	0.026/0.057
		1	1	1	ZB5AZ1054	0.026/0.057
		1	2	1	ZB5AZ1414	0.036/0.079

Light blocks

Plug-in connector

Description	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	≈ 24 (50 or 60 Hz)	White	5	ZBVB14	0.016/0.035
		Green	5	ZBVB34	0.016/0.035
		Red	5	ZBVB44	0.016/0.035
		Orange	5	ZBVB54	0.016/0.035
		Blue	5	ZBVB64	0.016/0.035
Protected LED	~ 110...120 (50 or 60 Hz)	White	5	ZBVG14	0.016/0.035
		Green	5	ZBVG34	0.016/0.035
		Red	5	ZBVG44	0.016/0.035
		Orange	5	ZBVG54	0.016/0.035
		Blue	5	ZBVG64	0.016/0.035
	~ 230...240 (50 or 60 Hz)	White	5	ZBVM14	0.016/0.035
		Green	5	ZBVM34	0.016/0.035
		Red	5	ZBVM44	0.016/0.035
		Orange	5	ZBVM54	0.016/0.035
		Blue	5	ZBVM64	0.016/0.035

Connecting cables and connector

Description	Number of connectors	Wire c.s.a. mm ² /AWG	Length mm/in.	Sold in lots of	Unit reference	Weight kg/lb
Cables with connectors 2-pin, 5.08 mm /0.200 in. pitch	1	0.75/19	500/19.685	8	APE1C2150	0.120/0.265
	2	0.75/19	500/19.685	8	APE1C2250	0.180/0.397
Spring terminal connector 2-pin, 5.08 mm /0.200 in. pitch	–	0.2 to 2.5 /25 to 14	–	10	APE1PRE21	0.003/0.007

(1) It is not possible to fit an additional contact block on the back of these contact blocks.



Control and signaling units Ø 22

Harmony XB5, plastic

Body/contact assemblies and light blocks with integral LED

To combine with:
heads, see pages 19 to 35
contacts, see page 40




Complete body/contact assemblies and light blocks ⁽¹⁾						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Light source	Supply voltage V	Type of contact		Color of light source	Reference	Weight kg/lb
						
		N/O	N/C			
Direct supply						
Integral LED Protected LED	~ 24 (50 or 60 Hz)	1	-	White	ZB5AW0B11	0.032/0.071
				Green	ZB5AW0B31	0.032/0.071
				Red	ZB5AW0B41	0.032/0.071
				Orange	ZB5AW0B51	0.032/0.071
				Blue	ZB5AW0B61	0.032/0.071
		-	1	White	ZB5AW0B12	0.032/0.071
				Green	ZB5AW0B32	0.032/0.071
				Red	ZB5AW0B42	0.032/0.071
				Orange	ZB5AW0B52	0.032/0.071
				Blue	ZB5AW0B62	0.032/0.071
	2	-	White	ZB5AW0B13	0.042/0.093	
			Green	ZB5AW0B33	0.042/0.093	
			Red	ZB5AW0B43	0.042/0.093	
			Orange	ZB5AW0B53	0.042/0.093	
			Blue	ZB5AW0B63	0.042/0.093	
	1	1	White	ZB5AW0B15	0.042/0.093	
			Green	ZB5AW0B35	0.042/0.093	
			Red	ZB5AW0B45	0.042/0.093	
			Orange	ZB5AW0B55	0.042/0.093	
			Blue	ZB5AW0B65	0.042/0.093	
~ 110...120 (50 or 60 Hz)	1	-	White	ZB5AW0G11	0.032/0.071	
			Green	ZB5AW0G31	0.032/0.071	
			Red	ZB5AW0G41	0.032/0.071	
			Orange	ZB5AW0G51	0.032/0.071	
			Blue	ZB5AW0G61	0.032/0.071	
	-	1	White	ZB5AW0G12	0.032/0.071	
			Green	ZB5AW0G32	0.032/0.071	
			Red	ZB5AW0G42	0.032/0.071	
			Orange	ZB5AW0G52	0.032/0.071	
			Blue	ZB5AW0G62	0.032/0.071	
2	-	White	ZB5AW0G13	0.042/0.093		
		Green	ZB5AW0G33	0.042/0.093		
		Red	ZB5AW0G43	0.042/0.093		
		Orange	ZB5AW0G53	0.042/0.093		
		Blue	ZB5AW0G63	0.042/0.093		
1	1	White	ZB5AW0G15	0.042/0.093		
		Green	ZB5AW0G35	0.042/0.093		
		Red	ZB5AW0G45	0.042/0.093		
		Orange	ZB5AW0G55	0.042/0.093		
		Blue	ZB5AW0G65	0.042/0.093		


Other versions

Complete bodies with Faston connector terminals (6.35 or 2 x 2.8/0.250 or 2 x 0.110 in.). Please consult our Customer Care Centre.

(1) Can be fitted with additional contact blocks, see page 40.

To combine with:
heads, see pages 19 to 35
contacts, see page 40


Complete body/contact assemblies and light blocks (1) (continued)
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Type of contact		Color of light source	Reference	Weight kg/lb
		 N/O	 N/C			
Direct supply (continued)						
Integral LED Protected LED	~ 230...240 (50 or 60 Hz)	1	–	White	ZB5AW0M11	0.032/0.071
				Green	ZB5AW0M31	0.032/0.071
				Red	ZB5AW0M41	0.032/0.071
				Orange	ZB5AW0M51	0.032/0.071
				Blue	ZB5AW0M61	0.032/0.071
		–	1	White	ZB5AW0M12	0.032/0.071
				Green	ZB5AW0M32	0.032/0.071
				Red	ZB5AW0M42	0.032/0.071
				Orange	ZB5AW0M52	0.032/0.071
				Blue	ZB5AW0M62	0.032/0.071
		2	–	White	ZB5AW0M13	0.042/0.093
				Green	ZB5AW0M33	0.042/0.093
				Red	ZB5AW0M43	0.042/0.093
				Orange	ZB5AW0M53	0.042/0.093
				Blue	ZB5AW0M63	0.042/0.093
		1	1	White	ZB5AW0M15	0.042/0.093
				Green	ZB5AW0M35	0.042/0.093
				Red	ZB5AW0M45	0.042/0.093
				Orange	ZB5AW0M55	0.042/0.093
				Blue	ZB5AW0M65	0.042/0.093

Other versions

Complete bodies with Faston connector terminals
(6.35 or 2 x 2.8/0.250 or 2 x 0.110 in.).
Please consult our Customer Care Centre.

(1) Can be fitted with additional contact blocks, see page 40.

Control and signaling units Ø 22

Harmony XB5, plastic

Body/light assemblies for pilot lights with integral LED

To combine with:
heads, see page 36
contacts, see page 40



ZB5AVJ1

Complete light bodies (fixing collar and light block with integral LED)				
Screw clamp terminal connections (Schneider Electric anti-loosening system)				
Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Integral LED Protected LED	~ 12 (50 or 60 Hz)	White	ZB5AVJ1	0.022/0.049
		Green	ZB5AVJ3	0.022/0.049
		Red	ZB5AVJ4	0.022/0.049
		Orange	ZB5AVJ5	0.022/0.049
		Blue	ZB5AVJ6	0.022/0.049
		White	ZB5AVB1	0.022/0.049
	~ 24 (1) (50 or 60 Hz)	Green	ZB5AVB3	0.022/0.049
		Red	ZB5AVB4	0.022/0.049
		Orange	ZB5AVB5	0.022/0.049
		Blue	ZB5AVB6	0.022/0.049
		White	ZB5AVBG1	0.022/0.049
		~ 24...120 (50 or 60 Hz)	Green	ZB5AVBG3
	Red		ZB5AVBG4	0.022/0.049
	Orange		ZB5AVBG5	0.022/0.049
	Blue		ZB5AVBG6	0.022/0.049
	White		ZB5AVG1	0.022/0.049
	~ 110...120 (1) (50 or 60 Hz)		Green	ZB5AVG3
		Red	ZB5AVG4	0.022/0.049
Orange		ZB5AVG5	0.022/0.049	
Blue		ZB5AVG6	0.022/0.049	
White		ZB5AVM1	0.022/0.049	
~ 230...240 (1) (50 or 60 Hz)		Green	ZB5AVM3	0.022/0.049
	Red	ZB5AVM4	0.022/0.049	
	Orange	ZB5AVM5	0.022/0.049	
	Blue	ZB5AVM6	0.022/0.049	

(1) Complete bodies with Faston connector terminals (6.35 or 2 x 2.8/0.250 or 2 x 0.110 in.), see page 44.

To combine with:
heads, see page 36
contacts, see page 40



ZB5AVB1156

Complete light bodies with 3-terminal "test" function

(fixing collar and light block with integral LED + pre-wired block for "test light" function)
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Integral LED Protected LED	~ 24 (1) (50 or 60 Hz)	White	ZB5AVB1156	0.022/0.049
		Green	ZB5AVB3156	0.022/0.049
		Red	ZB5AVB4156	0.022/0.049
		Orange	ZB5AVB5156	0.022/0.049
		Blue	ZB5AVB6156	0.022/0.049

Complete bodies with flashing pilot light

(fixing collar and light block with integral LED)
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Integral LED Protected LED	~ 24 (50 or 60 Hz)	White	ZB5AV18B1	0.022/0.049
		Green	ZB5AV18B3	0.022/0.049
		Red	ZB5AV18B4	0.022/0.049
		Orange	ZB5AV18B5	0.022/0.049
		Blue	ZB5AV18B6	0.022/0.049
	~ 110...120 (50 or 60 Hz)	White	ZB5AV18G1	0.022/0.049
		Green	ZB5AV18G3	0.022/0.049
		Red	ZB5AV18G4	0.022/0.049
		Orange	ZB5AV18G5	0.022/0.049
		Blue	ZB5AV18G6	0.022/0.049
		~ 230...240 (50 or 60 Hz)	White	ZB5AV18M1
	Green		ZB5AV18M3	0.022/0.049
	Red		ZB5AV18M4	0.022/0.049
	Orange		ZB5AV18M5	0.022/0.049
	Blue		ZB5AV18M6	0.022/0.049

(1) For a ~ 120 or 230 V supply, use complete body ZB5AVG● or ZB5AVM● with block for "test light" function type ZBZM156, see pages 41 and 48.



Control and signaling units Ø 22

Harmony XB5, plastic


Body/contact assemblies and light blocks with

BA 9s base fitting

To combine with:
heads, see page 21
contacts, see page 40

Complete body/contact assemblies and light blocks ⁽¹⁾							
For bulb with BA 9s base fitting (incandescent, neon or LED)							
Screw clamp terminal connections (Schneider Electric anti-loosening system)							
Light source	Supply voltage V	Type of contact		Color of light source	Reference	Weight kg/lb	
							
Direct supply							
BA 9s base fitting bulb, 2.4 W max., not included ⁽²⁾	≤ 250	1	–	–	ZB5AW061	0.031/0.068	
		–	1	–	ZB5AW062	0.031/0.068	
		2	–	–	ZB5AW063	0.041/0.090	
		1	1	–	ZB5AW065	0.041/0.090	
Supply via integral transformer (1.2 VA, 6 V secondary)							
Incandescent BA 9s base fitting bulb, included	~ 110...120 50 or 60 Hz	1	–	–	ZB5AW031	0.110/0.243	
		1	1	–	ZB5AW035	0.119/0.262	
	~ 230 50 Hz	1	–	–	ZB5AW041	0.110/0.243	
		1	1	–	ZB5AW045	0.119/0.262	
	~ 220...240 60 Hz	1	–	–	ZB5AW051	0.110/0.243	
		1	1	–	ZB5AW055	0.119/0.262	
	BA9s base fitting LED, included	~ 110...120 50 or 60 Hz	1	1	White	ZB5AW03D15	0.119/0.262
					Green	ZB5AW03D35	0.119/0.262
Red					ZB5AW03D45	0.119/0.262	
Orange					ZB5AW03D55	0.119/0.262	
Blue					ZB5AW03D65	0.119/0.262	
~ 230 50 Hz					1	1	White
~ 220...240 60 Hz		Green	ZB5AW04D35	0.119/0.262			
Red		ZB5AW04D45	0.119/0.262				
Orange		ZB5AW04D55	0.119/0.262				
Blue		ZB5AW04D65	0.119/0.262				
~ 400 50 or 60 Hz		1	1	White			ZB5AW05D15
Green				ZB5AW05D35	0.120/0.265		
Red				ZB5AW05D45	0.120/0.265		
Orange				ZB5AW05D55	0.120/0.265		
Blue				ZB5AW05D65	0.120/0.265		
Other versions				Complete bodies with integral transformer incorporating Faston connector terminals (6.35 or 2 x 2.8/0.250 or 2 x 0.110 in.). Please consult our Customer Care Centre.			


(1) Can be fitted with additional contact blocks, see page 40.
(2) Bulb to be ordered separately, see page 64.

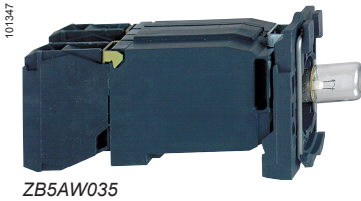

To combine with:
heads, see page 37
contacts, see page 40



ZB5AV6



ZB5AV3



ZB5AV156

Light blocks**Screw clamp terminal connections** (Schneider Electric anti-loosening system)

Description	Supply voltage V	Sold in lots of	Unit reference	Weight kg/lb
Direct supply for BA 9s base fitting bulb, 2.4 W max., not included (1)	≤ 250	5	ZB5V6	0.016/0.035

Complete light bodies (fixing collar and light block)**For bulb with BA 9s base fitting (incandescent, neon or LED)****Screw clamp terminal connections** (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Direct supply				
BA 9s base fitting bulb, 2.4 W max, not included (1)	≤ 250	–	ZB5AV6	0.022/0.049

Supply via integral transformer (1.2 VA, 6 V secondary)

BA 9s base fitting incandescent bulb, included	~ 110...120 -50 or 60 Hz	–	ZB5AV3	0.099/0.218	
	~ 230 - 50 Hz	–	ZB5AV4	0.099/0.218	
	~ 220...240 - 60 Hz	–	ZB5AV5	0.099/0.218	
	~ 400 - 50 Hz	–	ZB5AV5	0.099/0.218	
	~ 440...480 - 60 Hz	–	ZB5AV8	0.099/0.218	
BA 9s base fitting LED, included	~ 110...120 - 50 or 60 Hz	White	ZB5AV3D1	0.102/0.225	
		Green	ZB5AV3D3	0.102/0.225	
		Red	ZB5AV3D4	0.102/0.225	
		Orange	ZB5AV3D5	0.102/0.225	
		Blue	ZB5AV3D6	0.102/0.225	
		~ 230 - 50 Hz	White	ZB5AV4D1	0.102/0.225
	~ 220...240 - 60 Hz	Green	ZB5AV4D3	0.102/0.225	
		Red	ZB5AV4D4	0.102/0.225	
		Orange	ZB5AV4D5	0.102/0.225	
		Blue	ZB5AV4D6	0.102/0.225	
		~ 400 - 50 or 60 Hz	White	ZB5AV5D1	0.102/0.225
			Green	ZB5AV5D3	0.102/0.225
Red	ZB5AV5D4		0.102/0.225		
Orange	ZB5AV5D5		0.102/0.225		
		Blue	ZB5AV5D6	0.102/0.225	

Complete light bodies with 3-terminal “test” function (fixing collar + light block)**For bulb with BA 9s base fitting (incandescent, neon or LED)****Screw clamp terminal connections** (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Reference	Weight kg/lb
Direct supply			
BA 9s base fitting bulb, 2.4 W max, not included (1)	≤ 250	ZB5AV156	0.021/0.046


Other versions

Complete bodies with Faston connector terminals
(6.35 or 2 x 2.8/0.250 or 2 x 0.110 in.), see page 44.

(1) Bulb to be ordered separately, see page 64.

Pushbutton caps, unmarked

For use with	Type of push	Color	Sold in lots of	Unit reference	Weight kg/lb
Plastic pushbuttons					
ZBABA0 and ZB5AA0 circular pushbutton heads supplied without cap	Flush	White	10	ZBA1	0.001/0.002
		Black	10	ZBA2	0.001/0.002
		Green	10	ZBA3	0.001/0.002
		Red	10	ZBA4	0.001/0.002
		Yellow	10	ZBA5	0.001/0.002
		Blue	10	ZBA6	0.001/0.002
		6 colors (1)	1	ZBA9	0.006/0.013
	Projecting	White	10	ZBL1	0.001/0.002
		Black	10	ZBL2	0.001/0.002
		Green	10	ZBL3	0.001/0.002
		Red	10	ZBL4	0.001/0.002
		Yellow	10	ZBL5	0.001/0.002
		Blue	10	ZBL6	0.001/0.002
		6 colors (1)	1	ZBL9	0.006/0.013
ZB5CA0 square pushbutton heads supplied without cap	Flush	White	10	ZBC1	0.001/0.002
		Black	10	ZBC2	0.001/0.002
		Green	10	ZBC3	0.001/0.002
		Red	10	ZBC4	0.001/0.002
		Yellow	10	ZBC5	0.001/0.002
		Blue	10	ZBC6	0.001/0.002



(1) Set of 6 different colored caps: white, black, green, red, yellow, or blue.

Control and signaling units Ø 22

Harmony XB5, plastic

Accessories for heads

Marked pushbutton caps

107348



ZBA333

Pushbutton caps, marked							
For use with	Type of push	Marking		Color of cap	Unit reference	Weight kg/lb	
		Text	Color				
Plastic pushbuttons							
ZBABA0 and ZB5AA0 circular pushbutton heads supplied without cap (sold in lots of 10)	Flush	I (1)	White	Green	ZBA331	0.001/0.002	
			Black	White	ZBA131	0.001/0.002	
		II	White	Green	ZBA336	0.001/0.002	
			Black	White	ZBA136	0.001/0.002	
		III	White	Green	ZBA337	0.001/0.002	
			Black	White	ZBA137	0.001/0.002	
		IV	White	Green	ZBA338	0.001/0.002	
			START (1)	White	Green	ZBA333	0.001/0.002
			Black	White	ZBA133	0.001/0.002	
			ON	White	Green	ZBA341	0.001/0.002
		Black		White	ZBA141	0.001/0.002	
		MARCHE	White	Green	ZBA342	0.001/0.002	
			Black	White	ZBA142	0.001/0.002	
		UP (1)	Black	White	ZBA343	0.001/0.002	
		DOWN (1)	White	Black	ZBA344	0.001/0.002	
		⊕ (1)	White	Black	ZBA245	0.001/0.002	
			Black	White	ZBA145	0.001/0.002	
		↑ (2)	White	Black	ZBA335	0.001/0.002	
			Black	White	ZBA334	0.001/0.002	
		O (1)	White		Red	ZBA432	0.001/0.002
					Black	ZBA232	0.001/0.002
		ARRET	White		Red	ZBA433	0.001/0.002
					Black	ZBA233	0.001/0.002
		STOP (1)	White		Red	ZBA434	0.001/0.002
					Black	ZBA234	0.001/0.002
		OFF	White		Red	ZBA435	0.001/0.002
					Black	ZBA235	0.001/0.002
		⚠ (1)	White		Green	ZBA346	0.001/0.002
					Blue	ZBA639	0.001/0.002
		+	White	Black	ZBA2934	0.001/0.002	
		-	White	Black	ZBA2935	0.001/0.002	

(1) Double injection moulded marking.

(2) Can be clipped-in at 90° steps, through 360°

Control and signaling units Ø 22

Harmony XB5, plastic

Accessories for heads

Boots

107360



ZBP0

Transparent boots for pushbuttons (1)

Description	For use with plastic pushbuttons	Sold in lots of	Unit reference	Weight kg/lb
Single boots (2)	Flush with circular head	10	ZBPA	0.002/0.004
	Projecting with circular head and push-push version	10	ZBP0	0.002/0.004
	Flush or projecting with circular head for food industry applications	10	ZBP0A	0.002/0.004

Colored boots

Description	Color	For use with	Sold in lots of	Unit reference	Weight kg/lb
Colored boots (can be replaced without dismantling the head)	White	ZB5AP1S	10	ZBP011	0.003/0.007
	Black	ZB5AP2S	10	ZBP012	0.003/0.007
	Green	ZB5AP3S	10	ZBP013	0.003/0.007
	Red	ZB5AP4S	10	ZBP014	0.003/0.007
	Yellow	ZB5AP5S	10	ZBP015	0.003/0.007
	Blue	ZB5AP6S	10	ZBP016	0.003/0.007
Clear membrane	Transparent	ZB5AP●83	10	ZBP017	0.003/0.007

(1) Boots for multiple-headed pushbuttons, see page 23.

(2) Permissible panel thickness 1 to 5 mm/0.039 to 0.179 in. cannot be used with legend holders.

PG113818




ZBV0153

Lens caps				
For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
Circular lens caps for light sources with integral LED				
Pilot lights	White	10	ZBV0113	0.002/0.004
	Green	10	ZBV0133	0.002/0.004
	Red	10	ZBV0143	0.002/0.004
	Orange	10	ZBV0153	0.002/0.004
	Blue	10	ZBV0163	0.002/0.004
	5 different colored grooved lenses (1)	10	ZBV0103S	0.010/0.022
Illuminated pushbuttons with flush push	White	10	ZBW9113	0.002/0.004
	Green	10	ZBW9133	0.002/0.004
	Red	10	ZBW9143	0.002/0.004
	Orange	10	ZBW9153	0.002/0.004
	Blue	10	ZBW9163	0.002/0.004
Illuminated pushbuttons with projecting push	White	10	ZBW9313	0.002/0.004
	Green	10	ZBW9333	0.002/0.004
	Red	10	ZBW9343	0.002/0.004
	Orange	10	ZBW9353	0.002/0.004
	Blue	10	ZBW9363	0.002/0.004
Square lens caps for plastic pushbuttons				
Pilot lights	White	10	ZBCV0113	0.002/0.004
	Green	10	ZBCV0133	0.002/0.004
	Red	10	ZBCV0143	0.002/0.004
	Orange	10	ZBCV0153	0.002/0.004
	Blue	10	ZBCV0163	0.002/0.004
Illuminated pushbuttons with flush push	White	10	ZBCW9113	0.002/0.004
	Green	10	ZBCW9133	0.002/0.004
	Red	10	ZBCW9143	0.002/0.004
	Orange	10	ZBCW9153	0.002/0.004
	Blue	10	ZBCW9163	0.002/0.004
Illuminated pushbuttons with projecting push	White	10	ZBCW9313	0.002/0.004
	Green	10	ZBCW9333	0.002/0.004
	Red	10	ZBCW9343	0.002/0.004
	Orange	10	ZBCW9353	0.002/0.004
	Blue	10	ZBCW9363	0.002/0.004
Circular lens caps for light sources with BA 9s fitting				
Pilot lights	White	10	ZBV011	0.002/0.004
	Green	10	ZBV013	0.002/0.004
	Red	10	ZBV014	0.002/0.004
	Orange	10	ZBV015	0.002/0.004
	Blue	10	ZBV016	0.002/0.004
	Clear	10	ZBV017	0.002/0.004
	Illuminated pushbuttons with flush push	White	10	ZBW911
Green		10	ZBW913	0.002/0.004
Red		10	ZBW914	0.002/0.004
Orange		10	ZBW915	0.002/0.004
Blue		10	ZBW916	0.002/0.004
Clear		10	ZBW917	0.002/0.004
Illuminated pushbuttons with projecting push	White	10	ZBW931	0.002/0.004
	Green	10	ZBW933	0.002/0.004
	Red	10	ZBW934	0.002/0.004
	Orange	10	ZBW935	0.002/0.004
	Blue	10	ZBW936	0.002/0.004
	Clear	10	ZBW937	0.002/0.004

(1) Clear, green, red, orange, or blue.

PG113819



ZBV016

Control and signaling units Ø 22

Harmony XB5, plastic

8 x 27 mm legends with 30 x 40 mm legend holders



ZBZ34




ZBYH101

30 x 40 mm/1.181 x 1.575 in. legend holders (flush mounting with bezel) for 8 x 27 mm/0.315 x 1.063 in. legends (1)


Description	Legend		Sold in lots of	Unit reference	Weight kg/lb
	Background Color	Marking			
Without legend	–	–	10	ZBZ34	0.003/0.007
With blank legend	Black or red	–	10	ZBY2H101	0.004/0.009
	White or yellow	–	10	ZBY4H101	0.004/0.009

Standard (30 x 40 mm/1.181 x 1.575 in.) legend holders for 8 x 27 mm/0.315 x 1.063 in. legends (1)


Description	Legend		Sold in lots of	Unit reference	Weight kg/lb		
	Color	Marking					
Without legend	–	–	10	ZBZ32	0.001/0.002		
With blank legend (for engraving)	Black or red	–	10	ZBY2101	0.002/0.004		
	White or yellow	–	10	ZBY4101	0.002/0.004		
With 8 x 27 mm /0.315 x 1.063 in. legend (2) (with International marking)	Black or red	O (black background)	10	ZBY2146	0.002/0.004		
		O (red background)	10	ZBY2931	0.002/0.004		
		I	10	ZBY2147	0.002/0.004		
		II	10	ZBY2148	0.002/0.004		
		O-I	10	ZBY2178	0.002/0.004		
		I-II	10	ZBY2179	0.002/0.004		
		I-O-II	10	ZBY2186	0.002/0.004		
		AUTO	10	ZBY2115	0.002/0.004		
		STOP	10	ZBY2304	0.002/0.004		
		Yellow		10	ZBY4140 (3)	0.002/0.004	
		With 8 x 27 mm /0.315 x 1.063 in. legend (2) (with French language marking)	Black or red	ARRET (red background)	10	ZBY2104	0.002/0.004
				ARRET (black background)	10	ZBY0104	0.002/0.004
				ARRET GENERAL	10	ZBY2129	0.002/0.004
				ARRET REARMEMENT	10	ZBY2133	0.002/0.004
				ARRET-MARCHE	10	ZBY2166	0.002/0.004
				ARRIERE	10	ZBY2106	0.002/0.004
AUTO CYCLE-CYCLE	10			ZBY2198	0.002/0.004		
AUTO CYCLE-MAIN	10			ZBY2199	0.002/0.004		
AUTO-MAIN	10			ZBY2164	0.002/0.004		
AUTO-O-MAIN	10			ZBY2185	0.002/0.004		
AVANT	10			ZBY2105	0.002/0.004		
AVANT-O-ARRIERE	10			ZBY2184	0.002/0.004		
C-P-C-NORMAL	10			ZBY2165	0.002/0.004		
CYCLE-MAIN	10			ZBY2197	0.002/0.004		
DECLENCHEMENT	10			ZBY2132	0.002/0.004		
DEFAULT (black background)	10			ZBY2134	0.002/0.004		
DEFAULT (red background)	10	ZBY2135	0.002/0.004				
DEPART CYCLE	10	ZBY2195	0.002/0.004				
DESCENTE	10	ZBY2108	0.002/0.004				
DROITE	10	ZBY2109	0.002/0.004				
ENCLENCHEMENT	10	ZBY2131	0.002/0.004				
EN SERVICE	10	ZBY2111	0.002/0.004				
FERMETURE	10	ZBY2114	0.002/0.004				
GAUCHE	10	ZBY2110	0.002/0.004				
HORS SERVICE	10	ZBY2112	0.002/0.004				
HORS-EN	10	ZBY2167	0.002/0.004				
LENT	10	ZBY2127	0.002/0.004				
MAIN	10	ZBY2116	0.002/0.004				
MARCHE	10	ZBY2103	0.002/0.004				
MONTEE	10	ZBY2107	0.002/0.004				
OUVERTURE	10	ZBY2113	0.002/0.004				
PHASE/PHASE	10	ZBY2196	0.002/0.004				
REARMEMENT (red background)	10	ZBY2123	0.002/0.004				
REARMEMENT (black background)	10	ZBY0123	0.002/0.004				
SOUS TENSION	10	ZBY2126	0.002/0.004				
VITE	10	ZBY2128	0.002/0.004				
Red	ARRET D'URGENCE	10	ZBY2130 (3)	0.002/0.004			




ZBZ32



ZBY101



ZBY4140




ZBY2107


(1) For legends, see pages 58 to 60.

(2) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).

(3) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo has been added.



ZBY2303



ZBY2228

Standard (30 x 40 mm/1.181 x 1.575 in.) legend holders with 8 x 27 mm /0.315 x 1.063 in. legends (continued)


Description	Legend		Sold in lots of	Reference	Weight kg/lb
	Color	Marking			
With legend (with English language marking)	Black or red background (1)	AUTO-HAND	10	ZBY2364	0.002/0.004
		AUTO-O-HAND	10	ZBY2385	0.002/0.004
		CLOSE	10	ZBY2314	0.002/0.004
		DOWN	10	ZBY2308	0.002/0.004
		FAST	10	ZBY2328	0.002/0.004
		FORWARD	10	ZBY2305	0.002/0.004
		HAND	10	ZBY2316	0.002/0.004
		HAND-OFF-AUTO	10	ZBY2387	0.002/0.004
		INCH	10	ZBY2321	0.002/0.004
		LEFT	10	ZBY2310	0.002/0.004
		OFF	10	ZBY2312	0.002/0.004
		OFF-ON	10	ZBY2367	0.002/0.004
		ON	10	ZBY2311	0.002/0.004
		OPEN	10	ZBY2313	0.002/0.004
		POWER ON	10	ZBY2326	0.002/0.004
		RESET (red background)	10	ZBY2323	0.002/0.004
		RESET (black background)	10	ZBY2322	0.002/0.004
		REVERSE	10	ZBY2306	0.002/0.004
		RIGHT	10	ZBY2309	0.002/0.004
		RUN	10	ZBY2334	0.002/0.004
SLOW	10	ZBY2327	0.002/0.004		
START	10	ZBY2303	0.002/0.004		
STOP-START	10	ZBY2366	0.002/0.004		
UP	10	ZBY2307	0.002/0.004		
	Red background	EMERGENCY STOP	10	ZBY2330 (2)	0.002/0.004
With legend (with German language marking)	Black or red background (1)	AB	10	ZBY2208	0.002/0.004
		AUF	10	ZBY2207	0.002/0.004
		AUS	10	ZBY2204	0.002/0.004
		AUS-EIN	10	ZBY2266	0.002/0.004
		AUS-IN BETRIEB	10	ZBY2267	0.002/0.004
		AUS-RÜCKSTELLUNG	10	ZBY2233	0.002/0.004
		AUSSCHALTEN	10	ZBY2232	0.002/0.004
		AUTO-HAND	10	ZBY2364	0.002/0.004
		AUTO-O-HAND	10	ZBY2385	0.002/0.004
		AUTOZYKL-HAND	10	ZBY2299	0.002/0.004
		AUTOZYKL- 1 ZYKL	10	ZBY2298	0.002/0.004
		C-P-C-NORMAL	10	ZBY2265	0.002/0.004
		EIN	10	ZBY2203	0.002/0.004
		EINSCHALTEN	10	ZBY2231	0.002/0.004
		HAND	10	ZBY2316	0.002/0.004
		LANGSAM	10	ZBY2227	0.002/0.004
		LINKS	10	ZBY2210	0.002/0.004
		NOT-AUS (red background)	10	ZBY2230	0.002/0.004
		ÖFFNEN	10	ZBY2213	0.002/0.004
		RECHTS	10	ZBY2209	0.002/0.004
		RÜCKSTELLUNG	10	ZBY2223	0.002/0.004
		SCHLIESSEN	10	ZBY2214	0.002/0.004
		SCHNELL	10	ZBY2228	0.002/0.004
		SPANNUNG EIN	10	ZBY2226	0.002/0.004
		STEUERUNG AUS	10	ZBY2212	0.002/0.004
		STEUERUNG EIN	10	ZBY2211	0.002/0.004
		STÖRUNG (black background)	10	ZBY2234	0.002/0.004
		STÖRUNG (red background)	10	ZBY2235	0.002/0.004
		VOR	10	ZBY2205	0.002/0.004
		VOR-O-ZURÜCK	10	ZBY2284	0.002/0.004
		ZURÜCK	10	ZBY2206	0.002/0.004
		ZYKLUS-HAND	10	ZBY2297	0.002/0.004
		ZYKLUSSTART	10	ZBY2295	0.002/0.004
	Red background	NOT-HALT	10	ZBY2229 (2)	0.002/0.004
	Yellow background	NOT-HALT	10	ZBY22420001 (2)	0.002/0.004

(1) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).

(2) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

8 x 27 mm/0.315 x 1.063 in. marked legends

(for 30 x 40 mm/1.181 x 1.575 in. legend holders ZBZ32 and ZBZ34)

Language	Color of background	Marking	Sold in lots of	Reference	Weight kg/lb	
Without	Black or red	–	10	ZBY0101	0.001/0.002	
	White or yellow	–	10	ZBY0102	0.001/0.002	
International	Black or red (1)	O (black background)	10	ZBY02146	0.001/0.002	
		O (red background)	10	ZBY02931	0.001/0.002	
		I	10	ZBY02147	0.001/0.002	
		II	10	ZBY02148	0.001/0.002	
		O-I	10	ZBY02178	0.001/0.002	
		I-II	10	ZBY02179	0.001/0.002	
		I-O-II	10	ZBY02186	0.001/0.002	
		AUTO	10	ZBY02115	0.001/0.002	
		STOP	10	ZBY02304	0.001/0.002	
		Yellow		10	ZBY0140 (2)	0.001/0.002
		French	Black or red (1)	ARRET (red background)	10	ZBY02104
ARRET (black background)	10			ZBY00104	0.001/0.002	
ARRET GENERAL	10			ZBY02129	0.001/0.002	
ARRET REARMEMENT	10			ZBY02133	0.001/0.002	
ARRET-MARCHE	10			ZBY02166	0.001/0.002	
ARRIERE	10			ZBY02106	0.001/0.002	
AUTO CYCLE-CYCLE	10			ZBY02198	0.001/0.002	
AUTO CYCLE-MAIN	10			ZBY02199	0.001/0.002	
AUTO-MAIN	10			ZBY02164	0.001/0.002	
AUTO-O-MAIN	10			ZBY02185	0.001/0.002	
AVANT	10			ZBY02105	0.001/0.002	
AVANT-O-ARRIERE	10			ZBY02184	0.001/0.002	
C-P-C-NORMAL	10			ZBY02165	0.001/0.002	
CYCLE-MAIN	10			ZBY02197	0.001/0.002	
DECLENCHEMENT	10			ZBY02132	0.001/0.002	
DEFAUT (black background)	10			ZBY02134	0.001/0.002	
DEFAUT (red background)	10			ZBY02135	0.001/0.002	
DEPART CYCLE	10			ZBY02195	0.001/0.002	
DESCENTE	10			ZBY02108	0.001/0.002	
DROITE	10			ZBY02109	0.001/0.002	
ENCLENCHEMENT	10			ZBY02131	0.001/0.002	
EN SERVICE	10			ZBY02111	0.001/0.002	
FERMETURE	10			ZBY02114	0.001/0.002	
GAUCHE	10			ZBY02110	0.001/0.002	
HORS SERVICE	10			ZBY02112	0.001/0.002	
HORS-EN	10			ZBY02167	0.001/0.002	
LENT	10			ZBY02127	0.001/0.002	
MAIN	10			ZBY02116	0.001/0.002	
MARCHE	10			ZBY02103	0.001/0.002	
MONTEE	10			ZBY02107	0.001/0.002	
OUVERTURE	10			ZBY02113	0.001/0.002	
PHASE/PHASE	10			ZBY02196	0.001/0.002	
REARMEMENT (red background)	10			ZBY02123	0.001/0.002	
REARMEMENT (black background)	10	ZBY00123	0.001/0.002			
SOUS TENSION	10	ZBY02126	0.001/0.002			
VITE	10	ZBY02128	0.001/0.002			
Red		ARRET D'URGENCE	10	ZBY02130 (2)	0.001/0.002	

(1) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above)

(2) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

DG121137



ZBY02931

DF540629



ZBY0140

DG121117



ZBY02014

8 x 27 mm/0.315 x 1.063 in. marked legends

(for 30 x 40 mm/1.181 x 1.575 in. legend holders ZBZ32 and ZBZ34) (continued)

Language	Color of background	Marking	Sold in lots of	Reference	Weight kg/lb		
English	Black or red (1)	AUTO-HAND	10	ZBY02364	0.001/0.002		
		AUTO-O-HAND	10	ZBY02385	0.001/0.002		
		CLOSE	10	ZBY02314	0.001/0.002		
		DOWN	10	ZBY02308	0.001/0.002		
		FAST	10	ZBY02328	0.001/0.002		
		FORWARD	10	ZBY02305	0.001/0.002		
		HAND	10	ZBY02316	0.001/0.002		
		HAND-OFF-AUTO	10	ZBY02387	0.001/0.002		
		INCH	10	ZBY02321	0.001/0.002		
		LEFT	10	ZBY02310	0.001/0.002		
		OFF	10	ZBY02312	0.001/0.002		
		OFF-ON	10	ZBY02367	0.001/0.002		
		ON	10	ZBY02311	0.001/0.002		
		OPEN	10	ZBY02313	0.001/0.002		
		POWER ON	10	ZBY02326	0.001/0.002		
		RESET (red background)	10	ZBY02323	0.001/0.002		
		RESET (black background)	10	ZBY02322	0.001/0.002		
		REVERSE	10	ZBY02306	0.001/0.002		
		RIGHT	10	ZBY02309	0.001/0.002		
		RUN	10	ZBY02334	0.001/0.002		
		SLOW	10	ZBY02327	0.001/0.002		
		START	10	ZBY02303	0.001/0.002		
		STOP-START	10	ZBY02366	0.001/0.002		
		UP	10	ZBY02307	0.001/0.002		
			Red	EMERGENCY STOP	10	ZBY02330 (2)	0.001/0.002
		German	Black or red (1)	AB	10	ZBY02208	0.001/0.002
AUF	10			ZBY02207	0.001/0.002		
AUS	10			ZBY02204	0.001/0.002		
AUS-EIN	10			ZBY02266	0.001/0.002		
AUS-IN BETRIEB	10			ZBY02267	0.001/0.002		
AUS-RÜCKSTELLUNG	10			ZBY02233	0.001/0.002		
AUSSCHALTEN	10			ZBY02232	0.001/0.002		
AUTO-HAND	10			ZBY02364	0.001/0.002		
AUTO-O-HAND	10			ZBY02385	0.001/0.002		
AUTOZYKL-HAND	10			ZBY02299	0.001/0.002		
AUTOZYKL- 1 ZYKL	10			ZBY02298	0.001/0.002		
C-P-C-NORMAL	10			ZBY02265	0.001/0.002		
EIN	10			ZBY02203	0.001/0.002		
EINSCHALTEN	10			ZBY02231	0.001/0.002		
HAND	10			ZBY02316	0.001/0.002		
LANGSAM	10			ZBY02227	0.001/0.002		
LINKS	10			ZBY02210	0.001/0.002		
NOT-AUS (red background)	10			ZBY02230	0.001/0.002		
ÖFFNEN	10			ZBY02213	0.001/0.002		
RECHTS	10			ZBY02209	0.001/0.002		
RÜCKSTELLUNG	10			ZBY02223	0.001/0.002		
SCHLIESSEN	10			ZBY02214	0.001/0.002		
SCHNELL	10			ZBY02228	0.001/0.002		
SPANNUNG EIN	10			ZBY02226	0.001/0.002		
STEUERUNG AUS	10			ZBY02212	0.001/0.002		
STEUERUNG EIN	10			ZBY02211	0.001/0.002		
STÖRUNG (black background)	10			ZBY02234	0.001/0.002		
STÖRUNG (red background)	10			ZBY02235	0.001/0.002		
VOR	10			ZBY02205	0.001/0.002		
VOR-O-ZURÜCK	10			ZBY02284	0.001/0.002		
ZURÜCK	10			ZBY02206	0.001/0.002		
ZYKLUS-HAND	10			ZBY02297	0.001/0.002		
ZYKLUSSTART	10			ZBY02295	0.001/0.002		
	Red			NOT-HALT	10	ZBY02229 (2)	0.001/0.002
	Yellow			NOT-HALT	10	ZBY022420001 (2)	0.001/0.002

Sheets of peel-off legends (with backing board and protective transparent cover)

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Sheet of 76 legends 8 x 27 mm 0.315 x 1.063 in.	30 x 40 mm/1.181 x 1.575 in. legend holder ZBZ32 and ZBZ34	10	ZBY4100	0.043/0.095

(1) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).

(2) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

DG121279

START


ZBY02303

DG121284

SCHNELL

ZBY02228

814309

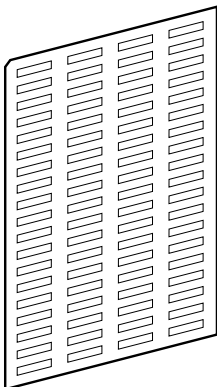


ZBY4100

Control and signaling units Ø 22

Harmony XB5, plastic

Legend holders for 18 x 27 mm legends

18 x 27 mm legends for engraving or printing

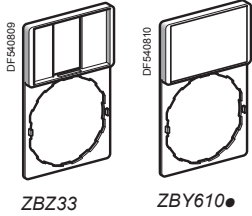


ZBZ33

ZBY610●

Standard (30 x 50 mm/1.181 x 1.968 in.) legend holders for 18 x 27 mm/0.709 x 1.063 in. legends

Description	Color of background	Sold in lots of	Unit reference	Weight kg/lb
Without legend	–	10	ZBZ33	0.001/0.002
With blank legend	Black or red	10	ZBY6101	0.002/0.004
	White or yellow	10	ZBY6102	0.002/0.004
	Yellow	10	ZBY6140 (1)	0.002/0.004

30 x 50 mm/1.181 x 1.968 in. legend holder (flush mounting with bezel) for 18 x 27 mm/0.709 x 1.063 in. legends




ZBZ35

ZBY6H10●

Description	Color of background	Sold in lots of	Unit reference	Weight kg/lb
Without legend	–	10	ZBZ35	0.003/0.007
With blank legend	Black or red	10	ZBY6H101	0.004/0.009
	White or yellow	10	ZBY6H102	0.004/0.009

18 x 27 mm/0.709 x 1.063 in. legends for engraving (for 30 x 50 mm/1.181 x 1.968 in. legend-holders)



ZBY6140

Description	Language	Marking	Sold in lots of	Unit reference	Weight kg/lb
Black or red background	–	Without	10	ZBY5101	0.001/0.002
White or yellow background	–	Without	10	ZBY5102	0.001/0.002
Yellow background	International		10	ZBY6140 (1)	0.001/0.002
	French	ARRET D'URGENCE	10	ZBY55130 (1)	0.001/0.002
	English	EMERGENCY STOP	10	ZBY55330 (1)	0.001/0.002

Sheets of peel-off legends (with backing board and protective transparent cover)


Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Sheet of 40 18 x 27 mm /0.709 x 1.063 in. legends	30 x 50 mm /1.181 x 1.968 in. legend holder ZBZ33 and ZBZ35	10	ZBY5100	0.044/0.097

(1) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo has been added.


Control and signaling units Ø 22

Harmony XB5, plastic


Legends, for insertion, for printing, pre-printed, labelling software, circular legends

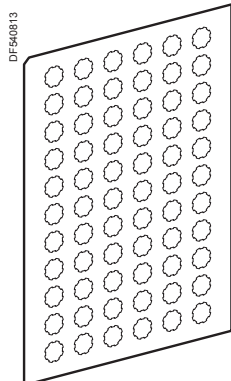

ZBY1101



XBY2U



ZBY9360

Legends for XB5A pushbuttons, illuminated pushbuttons and pilot lights

Description	Language	Marking	Sold in lots of	Unit reference	Weight kg/lb
Sheets of 66 circular peel-off, transparent, self-adhesive legends	–	Without	10	ZBY1101	0.017/0.037
Strips of 66 circular peel-off, transparent, self-adhesive legends	International	O	10	ZBY1146	0.017/0.037
		I	10	ZBY1147	0.017/0.037
		II	10	ZBY1148	0.017/0.037
		III	10	ZBY1149	0.017/0.037
		STOP	10	ZBY1304	0.017/0.037
		†	10	ZBY1912	0.017/0.037
	French	ARRET	10	ZBY1104	0.017/0.037
		ARRIERE	10	ZBY1106	0.017/0.037
		AUTO	10	ZBY1115	0.017/0.037
		AVANT	10	ZBY1105	0.017/0.037
		DESCENTE	10	ZBY1108	0.017/0.037
		MAIN	10	ZBY1116	0.017/0.037
		MARCHE	10	ZBY1103	0.017/0.037
		MONTEE	10	ZBY1107	0.017/0.037
	English	HAND	10	ZBY1316	0.017/0.037
		OFF	10	ZBY1312	0.017/0.037
		ON	10	ZBY1311	0.017/0.037
		START	10	ZBY1303	0.017/0.037
	German	AB	10	ZBY1208	0.017/0.037
AUF		10	ZBY1207	0.017/0.037	
AUS		10	ZBY1204	0.017/0.037	
EIN		10	ZBY1203	0.017/0.037	
ZU		10	ZBY1214	0.017/0.037	

"SIS Label" labelling software

Application	For use with	Reference	Weight kg/lb
Legend design for English, French, German, Spanish, Italian	ZBY001, ZBY0101, ZBY0102, ZBY1101 ZBY4100, ZBY5100, ZBY5101 and ZBY5102	XBY2U	0.100/0.220

Circular yellow legends for mushroom head pushbuttons


Used for "Emergency stop" function (1)

Diameter mm/in.	Conforming to standards	Marking on yellow background	Sold in lots of	Reference	Weight kg/lb
90/3.543	EN/IEC 60204-1 and EN/ISO 13850	–	10	ZBY8140	0.008/0.018
		ARRET D'URGENCE	10	ZBY8130	0.008/0.018
		EMERGENCY STOP	10	ZBY8330	0.008/0.018
		NOT-HALT	10	ZBY8230	0.008/0.018
		PARADA DE EMERGENCIA	10	ZBY8430	0.008/0.018
		ARRESTO DE EMERGENZA	10	ZBY8630	0.008/0.018

Used for "Emergency switching off" function

60/2.362	EN/IEC 60204-1	–	10	ZBY9101	0.004/0.009
		COUPURE D'URGENCE	10	ZBY9160	0.004/0.009
		EMERGENCY SWITCHING OFF	10	ZBY9360	0.004/0.009
		NOT-AUS	10	ZBY9260	0.004/0.009
		DESCONEXION DE EMERGENCIA	10	ZBY9460	0.004/0.009
		INTERRUZIONE DI EMERGENZA	10	ZBY9660	0.004/0.009
90/3.543	EN/IEC 60204-1	–	10	ZBY8101	0.008/0.018
		COUPURE D'URGENCE	10	ZBY8160	0.008/0.018
		EMERGENCY SWITCHING OFF	10	ZBY8360	0.008/0.018
		NOT-AUS	10	ZBY8260	0.008/0.018
		DESCONEXION DE EMERGENCIA	10	ZBY8460	0.008/0.018
		INTERRUZIONE DI EMERGENZA	10	ZBY8660	0.008/0.018


(1) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

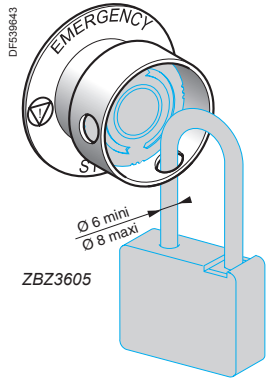


ZBZ3605



ZBY9330T



ZBY9360T



ZBZ160●



ZB4BZ64



ZBZ28

Accessories for mushroom head pushbuttons

Description	Exclusive use with the following Ø 40/1.575 in. trigger action pushbuttons	Color	Reference	Weight kg/lb
Padlocking kit (1) (2) for Emergency stop (3) and Emergency switching off function (4), (padlockable)	XB5AS844● XB5AS944● ZB5AS844 ZB5AS944●	Yellow	ZBZ3605	0.045/0.099
Metal guards for Emergency stop (3) function Padlockable (2)	XB5AT8● XB5AS8● XB5AS9● ZB5AT8● ZB5AS8● ZB5AS9●	Chromium plated	ZBZ1600	0.046/0.101
		Black	ZBZ1602	0.046/0.101
		Red	ZBZ1604	0.046/0.101
		Blue	ZBZ1606	0.046/0.101

Description	Marking	Color	Reference	Weight kg/lb
Ø 60 mm/2.363 in. legend for padlocking device ZBZ3605 for Emergency stop function (3)	-	Yellow	ZBY9140T	0.004/0.009
	ARRET D'URGENCE	Yellow	ZBY9130T	0.004/0.009
	EMERGENCY STOP	Yellow	ZBY9330T	0.004/0.009
	NOT-HALT	Yellow	ZBY9230T	0.004/0.009
Ø 60 mm/2.363 in. legend for padlocking device ZBZ3605 for Emergency switching off function (4)	-	Yellow	ZBY9101T	0.004/0.009
	COUPURE D'URGENCE	Yellow	ZBY9160T	0.004/0.009
	EMERGENCY SWITCHING OFF	Yellow	ZBY9360T	0.004/0.009
	NOT-AUS	Yellow	ZBY9260T	0.004/0.009
Ø 60 mm/2.363 in. circular legend compatible with Emergency stop	-	Yellow	ZBY9121	0.007/0.015
	EMERGENCY STOP	Yellow	ZBY9320	0.007/0.015
	ARRET D'URGENCE	Yellow	ZBY9120	0.007/0.015
	NOT-HALT	Yellow	ZBY9220	0.007/0.015
	PARADA DE EMERGENCIA	Yellow	ZBY9420	0.007/0.015
	ARRESTO DI EMERGENZA	Yellow	ZBY9620	0.007/0.015

Other accessories

Description	For use with	Color	Reference	Weight kg/lb
Plastic guard	Selector switches and key switches	Black	ZBZ2102	0.005/0.011
Padlockable flaps	Flush type pushbuttons	Black	ZB4BZ62	0.076/0.168
		Red	ZB4BZ64	0.076/0.168
		Yellow	ZB4BZ65	0.076/0.168
		Blue	ZB4BZ66	0.076/0.168

Description	Material	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
Bellows seals for harsh environments (Environments subject to humidity, dust, high-pressure cleaning etc...) IP 69K (5)	Silicone	Emergency stop /Switching off function	Yellow	2	ZBZ28	0.009/0.020
		Other functions	Black	2	ZBZ58	0.009/0.020

- (1) Standard circular legends are not compatible with this product. Use special legends **ZBY9●●●T**.
- (2) No isolation function is possible when this guard is fitted.
- (3) Ensures conformity with standards EN/IEC 60204-1 and EN/ISO 13850.
- (4) Ensures conformity with standard EN/IEC 60204-1.
- (5) Only when mounted on control stations. Use legends **ZBY9●●●T**.

Control and signaling units Ø 22

Harmony XB5, plastic
Accessories for pushbuttons


ZB5SZ3




ZB4BZ007



ZB5AZ026



ZBZ007


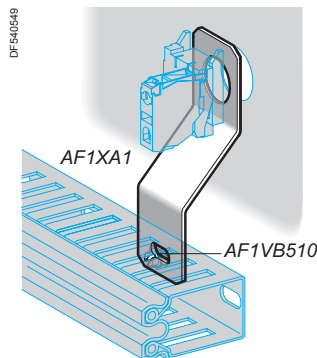


Other accessories (continued)

Description	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
Plastic blanking plug (with fixing nut)	Circular shape Ø 22 mm/0.866 in. control and signaling units	Black	10	ZB5SZ3	0.009/0.020
	Square shape Ø 22 mm/0.866 in. control and signaling units	Black	10	ZB5SZ5	0.009/0.020
Liquid spray protective washer to be fitted under the head	Ø 22 mm/0.866 in. control and signaling units	Chromium plated	50	ZB4BZ007	0.010/0.022
		Black	50	ZB4BZ0077	0.010/0.022
Ø 30 mm/1.181 in. Plastic flush mounting kit	for pushbuttons and pilot lights	Black	1	ZB5AZ021	0.006/0.013
	for selector switches and illuminated pushbuttons	Black	1	ZB5AZ022	0.007/0.015
Ø 30 mm/1.181 in. Plastic flush mounting kit with 1 line legend	for pushbuttons and pilot lights	Black	1	ZB5AZ023	0.007/0.015
	for selector switches and illuminated pushbuttons	Black	1	ZB5AZ024	0.008/0.018
Ø 30 mm/1.181 in. Plastic flush mounting kit with 2 lines legend	for pushbuttons and pilot lights	Black	1	ZB5AZ025	0.007/0.015
	for selector switches and illuminated pushbuttons	Black	1	ZB5AZ026	0.009/0.020
Plastic clips	2 or 3 levels of contact blocks ZBE10● in high vibration environment	–	10	ZBZ007	–
Dummy contact block	Contact blocks ZBE10● and transformer blocks ZBV5B	–	5	ZBE000	–
Set of tabs for Faston connection	Contact blocks ZBE10● and light blocks ZBV●	–	10	ZBZ003	–

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Cable ducting support	Fixing beneath head	10	AF1XA1	0.030/0.066
M5 x 10 screw, with hexagonal slotted head	For fixing cable ducting	100	AF1VB510	0.003/0.066
Support	Pushbuttons, switches and pilot lights	1	DX1AP52	0.160/0.353
Boot for contact block ZBE10● and ZBE10●3 (1)	For protection against dusty environment	1	ZBZ60	0.098/0.216

(1) Restriction for use: refer to the product instruction sheet on Schneider Electric website, Harmony XB5 page.



Bulbs with BA 9s base fitting and associated accessories

Illuminated pushbuttons

Description	Characteristics	Color	Sold in lots of	Unit reference	Weight kg/lb
LEDs	~ 24 V	White	1	DL1CJ0241	0.002/0.004
		Green	1	DL1CJ0243	0.002/0.004
		Red	1	DL1CJ0244	0.002/0.004
		Orange	1	DL1CJ0245	0.002/0.004
		Blue	1	DL1CJ0246	0.002/0.004
	~ 48 V	Green	1	DL1CJ0483	0.002/0.004
		Red	1	DL1CJ0484	0.002/0.004
		Orange	1	DL1CJ0485	0.002/0.004
	6 V - 1.2 W	White	1	DL1CD0061	0.002/0.004
		Green	1	DL1CD0063	0.002/0.004
		Red	1	DL1CD0064	0.002/0.004
		Orange	1	DL1CD0065	0.002/0.004
		Blue	1	DL1CD0066	0.002/0.004
Incandescent bulbs	6 V - 1.2 W	-	10	DL1CB006	0.002/0.004
	24 V - 2 W	-	10	DL1CE024	0.002/0.004
	120...130 V 2.4 W	-	10	DL1CE130	0.002/0.004
Neon bulbs	120...130 V	-	10	DL1CF110	0.002/0.004
	230...240 V	-	10	DL1CF220	0.002/0.004
Bulb extractor	-	-	1	XBFX13	0.005/0.011
Lens cap tightening tool	Illuminated pushbuttons, with flush push	-	1	ZBZ8	0.009/0.020

Description	Application	Color	Sold in lots of	Unit reference	Weight kg/lb
Add-on square trim	Gives a square appearance to ZB5A circular heads	Black	10	ZB5AZ31	0.002/0.004
		Green	10	ZB5AZ1715626002	0.002/0.004
		Red	10	ZB5AZ1715626001	0.002/0.004
		Blue	10	ZB5AZ1715626003	0.002/0.004
Nut	Fixing ZB5A head		10	ZB5AZ901	0.002/0.004
Bezel tool	Tightening head fixing nut ZB5AZ901		1	ZB5AZ905	0.016/0.035
Anti-rotation plate	Selector switches and Emergency stop pusbuttons heads ZB5A		10	ZB5AZ902	0.008/0.018



ZBG455



ZBDLU1



ZBG455P



ZBGP



ZBDD2

Replacement keys

Description	Key number	Reference	Weight kg/lb
For latching mushroom head pushbuttons and selector switches			
Sets of 2 keys	455	ZBG455	0.013/0.029
	421E	ZBG421E	0.014/0.031
	458A	ZBG458A	0.014/0.031
	520E	ZBG520E	0.014/0.031
	3131A	ZBG3131A	0.014/0.031
	4A185	ZBDA185	0.014/0.031
	LU1	ZBDLU1	0.014/0.031
	LU2	ZBDLU2	0.014/0.031
	LU3	ZBDLU3	0.014/0.031
	LU4	ZBDLU4	0.014/0.031
	LU5	ZBDLU5	0.014/0.031
	LU6	ZBDLU6	0.014/0.031
	LU7	ZBDLU7	0.014/0.031
	LU8	ZBDLU8	0.014/0.031
	LU9	ZBDLU9	0.014/0.031
	LU10	ZBDLU10	0.014/0.031
	LU11	ZBDLU11	0.014/0.031
	LU12	ZBDLU12	0.014/0.031
	LU13	ZBDLU13	0.014/0.031
	LU14	ZBDLU14	0.014/0.031
	8D1	ZBD8D1	0.014/0.031
	Specific key	ZBGK (1)	0.014/0.031

For booted selector switches

Sets of 2 keys, one of which supplied booted (rubber boot)	455	ZBG455P	–
	421E	ZBG421EP	–
	458A	ZBG458AP	–
	520E	ZBG520EP	–
	3131A	ZBG3131AP	–

Accessory for key switches (2)

Description	Function	Reference	Weight kg/lb
Keyhole cover (rubber boot)	Protection of lock barrel when no key inserted in lock	ZBGP	0.005/0.011

Boot for standard handle

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Boot for standard handle	ZB4BD●● and ZB5AD●●	5	ZBDD2	0.005/0.011

(1) Key number to be added when ordering.

(2) Not compatible with products with key TEC10.

A					
AF1VB510	63	XB5AJ53	31	XB5AVM4	36
AF1XA1	63	XB5AK123B5	34	XB5AVM5	36
APE1C2150	45	XB5AK123G5	34	XB5AVM6	36
APE1C2250	45	XB5AK123M5	34	XB5AW31B5	19
APE1PRE21	45	XB5AK124B5	34	XB5AW31G5	19
		XB5AK124G5	34	XB5AW31M5	19
		XB5AK124M5	34	XB5AW33B5	19
		XB5AK125B5	34	XB5AW33G5	19
		XB5AK125G5	34	XB5AW33M5	19
		XB5AK125M5	34	XB5AW34B5	19
		XB5AK133B5	34	XB5AW34G5	19
		XB5AK133G5	34	XB5AW34M5	19
		XB5AK133M5	34	XB5AW35B5	19
		XB5AK134B5	34	XB5AW35G5	19
		XB5AK134G5	34	XB5AW35M5	19
		XB5AK134M5	34	XB5AW36B5	19
		XB5AK135B5	34	XB5AW36G5	19
		XB5AK135G5	34	XB5AW36M5	19
		XB5AK135M5	34	XB5AW3135	21
		XB5AL42	16	XB5AW3145	21
		XB5AL4322	18	XB5AW3165	21
		XB5AL73415	22	XB5AW3335	21
		XB5AL84101	38	XB5AW3345	21
		XB5AL84201	38	XB5AW3365	21
		XB5AP21	17	XB5AW3435	21
		XB5AP31	17	XB5AW3445	21
		XB5AP42	17	XB5AW3465	21
		XB5AP51	17	XB5AW3535	21
		XB5AP61	17	XB5AW3545	21
		XB5AS8442	26	XB5AW3565	21
		XB5AS8444	26	XB5AW73731B5	22
		XB5AS8445	26	XB5AW73731G5	22
		XB5AS9442	26	XB5AW73731M5	22
		XB5AS9445	26	XB5DSB	38
		XB5AT842	26	XB5DSG	38
		XB5AT845	26	XB5DSM	38
		XB5AV5B1	37	XB5DT1S	38
		XB5AV5B3	37	XB5EVB1	36
		XB5AV5B4	37	XB5EVB3	36
		XB5AV5B5	37	XB5EVB4	36
		XB5AV5B6	37	XB5EVB5	36
		XB5AV31	37	XB5EVB6	36
		XB5AV33	37	XB5EVB8	36
		XB5AV34	37	XB5EVG1	36
		XB5AV35	37	XB5EVG3	36
		XB5AV41	37	XB5EVG4	36
		XB5AV43	37	XB5EVG5	36
		XB5AV44	37	XB5EVG6	36
		XB5AV45	37	XB5EVG8	36
		XB5AV61	37	XB5EVM1	36
		XB5AV63	37	XB5EVM3	36
		XB5AV64	37	XB5EVM4	36
		XB5AV65	37	XB5EVM5	36
		XB5AVB1	36	XB5EVM6	36
		XB5AVB3	36	XB5EVM8	36
		XB5AVB4	36	XB5KSB	38
		XB5AVB5	36	XB5KSG	38
		XB5AVB6	36	XB5KSM	38
		XB5AVG1	36	XBFX13	64
		XB5AVG3	36	XBY2U	40
		XB5AVG4	36		42
		XB5AVG5	36		44
		XB5AVG6	36		61
		XB5AVM1	36		61
		XB5AVM3	36	XD5PA14	39
				XD5PA22	39
				XD5PA24	39
				Z	
				ZB2BE101	40
				ZB2BE102	40
				ZB4BZ007	63
				ZB4BZ62	62
				ZB4BZ64	62
				ZB4BZ65	62
				ZB4BZ66	62
				ZB4BZ0077	63
				ZB4BZ106	40
				ZB4BZ107	40
				ZB5AA0	14
				ZB5AA1	14
				ZB5AA2	14
				ZB5AA3	14
				ZB5AA4	14
				ZB5AA5	14
				ZB5AA6	14
				ZB5AA8	14
				ZB5AA9	14
				ZB5AA14	14
				ZB5AA16	15
				ZB5AA18	14
					20
				ZB5AA24	14
				ZB5AA26	15
				ZB5AA34	14
				ZB5AA36	15
				ZB5AA38	14
					20
				ZB5AA44	14
				ZB5AA46	15
				ZB5AA48	14
					20
				ZB5AA54	14
				ZB5AA56	15
				ZB5AA58	14
					20
				ZB5AA64	14
				ZB5AA66	15
				ZB5AA68	14
					20
				ZB5AA79	22
				ZB5AA131	18
				ZB5AA133	18
				ZB5AA136	18
				ZB5AA141	18
				ZB5AA142	18
				ZB5AA145	18
				ZB5AA232	18
				ZB5AA233	18
				ZB5AA234	18
				ZB5AA235	18
				ZB5AA245	18
				ZB5AA331	18
				ZB5AA333	18
				ZB5AA334	18
				ZB5AA335	18
				ZB5AA336	18
				ZB5AA341	18
				ZB5AA342	18
				ZB5AA343	18
				ZB5AA344	18
				ZB5AA432	18
				ZB5AA433	18
				ZB5AA434	18
				ZB5AA435	18
				ZB5AA791	23
				ZB5AA7120	22
				ZB5AA7121	22
				ZB5AA7340	22
				ZB5AA7341	22
				ZB5AA71115	23
				ZB5AA71123	23
				ZB5AA71124	23
				ZB5AA72124	23
				ZB5AA73132	23
				ZB5AA73133	23
				ZB5AA73134	23
				ZB5AA73135	23
				ZB5AC2	24
				ZB5AC3	24
				ZB5AC4	24
				ZB5AC5	24
				ZB5AC6	24
				ZB5AC24	24
				ZB5AC34	24
				ZB5AC44	24
				ZB5AC54	24
				ZB5AC64	24
				ZB5AD2	30
				ZB5AD3	30
				ZB5AD4	30
				ZB5AD5	30
				ZB5AD7	30
				ZB5AD8	30
				ZB5AD28	33
				ZB5AD29	33
				ZB5AD39	33
				ZB5AD48	33
				ZB5AD49	33
				ZB5AD59	33
				ZB5AD79	33
				ZB5AD89	33
				ZB5AD912	38
				ZB5AD922	38
				ZB5AD2801	33
				ZB5AD2804	33
				ZB5AD2806	33
				ZB5AF	29
				ZB5AF351	29
				ZB5AFDA	29
				ZB5AFDB	29
				ZB5AFDC	29
				ZB5AFDD	29
				ZB5AFDE01	29
				ZB5AFDE02	29
				ZB5AFDE03	29
				ZB5AFDE04	29
				ZB5AFDE05	29
				ZB5AFDE06	29
				ZB5AFDE07	29
				ZB5AFDE08	29
				ZB5AFDE09	29
				ZB5AFDE10	29
				ZB5AFDE11	29
				ZB5AFDE12	29

ZB5AFDE13	29	ZB5AK1213	35	ZB5AP18	17	ZB5AV5D4	51	ZB5AVJ4	48
ZB5AFDE14	29	ZB5AK1233	35	ZB5AP38	17	ZB5AV5D5	51	ZB5AVJ5	48
ZB5AFDE15	29	ZB5AK1243	35	ZB5AP48	17	ZB5AV5D6	51	ZB5AVJ6	48
ZB5AG0	32	ZB5AK1253	35	ZB5AP58	17	ZB5AV05S	37	ZB5AVM1	48
ZB5AG0D	33	ZB5AK1263	35	ZB5AP68	17	ZB5AV06	37	ZB5AVM3	48
ZB5AG1	32	ZB5AK1313	35	ZB5AP183	17	ZB5AV6	51	ZB5AVM4	48
ZB5AG1D	33	ZB5AK1333	35	ZB5AP383	17	ZB5AV06S	37	ZB5AVM5	48
ZB5AG2	32	ZB5AK1343	35	ZB5AP483	17	ZB5AV07	37	ZB5AVM6	48
ZB5AG02	32	ZB5AK1353	35	ZB5AP583	17	ZB5AV07S	37	ZB5AW0B12	46
ZB5AG2D	33	ZB5AK1363	35	ZB5AP683	17	ZB5AV8	51	ZB5AW0B13	46
ZB5AG02D	33	ZB5AK1413	35	ZB5AR2	24	ZB5AV9	51	ZB5AW0B15	46
ZB5AG3	32	ZB5AK1433	35	ZB5AR3	24	ZB5AV013	36	ZB5AW0B31	46
ZB5AG3D	33	ZB5AK1443	35	ZB5AR4	24	ZB5AV013E	36	ZB5AW0B32	46
ZB5AG03D	33	ZB5AK1453	35	ZB5AR5	24	ZB5AV013S	36	ZB5AW0B33	46
ZB5AG4	32	ZB5AK1463	35	ZB5AR6	24	ZB5AV18B1	49	ZB5AW0B35	46
ZB5AG4D	33	ZB5AK1513	35	ZB5AR216	24	ZB5AV18B3	49	ZB5AW0B41	46
ZB5AG04D	33	ZB5AK1533	35	ZB5AR316	24	ZB5AV18B4	49	ZB5AW0B42	46
ZB5AG5	32	ZB5AK1543	35	ZB5AR416	24	ZB5AV18B5	49	ZB5AW0B43	46
ZB5AG05	32	ZB5AK1553	35	ZB5AR516	24	ZB5AV18B6	49	ZB5AW0B45	46
ZB5AG5D	33	ZB5AK1563	35	ZB5AR616	24	ZB5AV18G1	49	ZB5AW0B51	46
ZB5AG05D	33	ZB5AK1713	35	ZB5AS12	25	ZB5AV18G3	49	ZB5AW0B52	46
ZB5AG6	32	ZB5AK1733	35	ZB5AS22	25	ZB5AV18G4	49	ZB5AW0B53	46
ZB5AG6D	33	ZB5AK1743	35	ZB5AS42	25	ZB5AV18G5	49	ZB5AW0B55	46
ZB5AG06D	33	ZB5AK1753	35	ZB5AS52	25	ZB5AV18G6	49	ZB5AW0B61	46
ZB5AG7	32	ZB5AK1763	35	ZB5AS55	25	ZB5AV18M1	49	ZB5AW0B62	46
ZB5AG07D	33	ZB5AK1813	35	ZB5AS62	25	ZB5AV18M3	49	ZB5AW0B63	46
ZB5AG7D	33	ZB5AK1833	35	ZB5AS72	25	ZB5AV18M4	49	ZB5AW0B65	46
ZB5AG8	32	ZB5AK1843	35	ZB5AS834	26	ZB5AV18M5	49	ZB5AW0G11	46
ZB5AG08	32	ZB5AK1853	35	ZB5AS842Y	27	ZB5AV18M6	49	ZB5AW0G12	46
ZB5AG8D	33	ZB5AK1863	35	ZB5AS844	26	ZB5AV033	36	ZB5AW0G13	46
ZB5AG08D	33	ZB5AL1	16	ZB5AS934	26	ZB5AV033E	36	ZB5AW0G15	46
ZB5AG9	32	ZB5AL2	16	ZB5AS942Y	27	ZB5AV033S	36	ZB5AW0G31	46
ZB5AG09	32	ZB5AL3	16	ZB5AS944	26	ZB5AV043	36	ZB5AW0G32	46
ZB5AG9D	33	ZB5AL4	16	ZB5AS944D	26	ZB5AV043E	36	ZB5AW0G33	46
ZB5AG09D	33	ZB5AL5	16	ZB5AS964	26	ZB5AV043S	36	ZB5AW0G35	46
ZB5AH0	28	ZB5AL6	16	ZB5AT2	25	ZB5AV053	36	ZB5AW0G41	46
ZB5AH01	28	ZB5AL232	18	ZB5AT24	25	ZB5AV053E	36	ZB5AW0G42	46
ZB5AH1	28	ZB5AL233	18	ZB5AT82Y	27	ZB5AV053S	36	ZB5AW0G43	46
ZB5AH02	28	ZB5AL234	18	ZB5AT84	26	ZB5AV063	36	ZB5AW0G45	46
ZB5AH2	28	ZB5AL235	18	ZB5AT844	26	ZB5AV063E	36	ZB5AW0G51	46
ZB5AH03	28	ZB5AL432	18	ZB5AT8643M	26	ZB5AV063S	36	ZB5AW0G52	46
ZB5AH3	28	ZB5AL433	18	ZB5AV01	37	ZB5AV156	51	ZB5AW0G53	46
ZB5AH04	28	ZB5AL434	18	ZB5AV01S	37	ZB5AVB1	48	ZB5AW0G55	46
ZB5AH4	28	ZB5AL435	18	ZB5AV003	36	ZB5AVB3	48	ZB5AW0G61	46
ZB5AH05	28	ZB5AL7340	22	ZB5AV03	37	ZB5AVB4	48	ZB5AW0G62	46
ZB5AH5	28	ZB5AL7341	22	ZB5AV3	51	ZB5AVB5	48	ZB5AW0G63	46
ZB5AH06	28	ZB5AP1	17	ZB5AV3D1	51	ZB5AVB6	48	ZB5AW0G65	46
ZB5AH6	28	ZB5AP1S	17	ZB5AV3D3	51	ZB5AVB1156	49	ZB5AW0M11	47
ZB5AH013	28	ZB5AP1S	54	ZB5AV3D4	51	ZB5AVB3156	49	ZB5AW0M12	47
ZB5AH13	28	ZB5AP2	17	ZB5AV3D5	51	ZB5AVB4156	49	ZB5AW0M13	47
ZB5AH033	28	ZB5AP2S	17	ZB5AV3D6	51	ZB5AVB5156	49	ZB5AW0M15	47
ZB5AH33	28	ZB5AP2S	54	ZB5AV03S	37	ZB5AVB6156	49	ZB5AW0M31	47
ZB5AH043	28	ZB5AP3	17	ZB5AV04	37	ZB5AVBG1	48	ZB5AW0M32	47
ZB5AH43	28	ZB5AP3S	17	ZB5AV4	51	ZB5AVBG3	48	ZB5AW0M33	47
ZB5AH053	28	ZB5AP3S	54	ZB5AV4D1	51	ZB5AVBG4	48	ZB5AW0M35	47
ZB5AH53	28	ZB5AP4	17	ZB5AV4D3	51	ZB5AVBG5	48	ZB5AW0M41	47
ZB5AH063	28	ZB5AP4S	17	ZB5AV4D4	51	ZB5AVBG6	48	ZB5AW0M42	47
ZB5AH63	28	ZB5AP4S	54	ZB5AV4D5	51	ZB5AVG1	48	ZB5AW0M43	47
ZB5AJ2	31	ZB5AP5	17	ZB5AV4D6	51	ZB5AVG3	48	ZB5AW0M45	47
ZB5AJ3	31	ZB5AP5S	17	ZB5AV04S	37	ZB5AVG4	48	ZB5AW0M51	47
ZB5AJ4	31	ZB5AP5S	54	ZB5AV05	37	ZB5AVG5	48	ZB5AW0M52	47
ZB5AJ5	31	ZB5AP6	17	ZB5AV5	51	ZB5AVG6	48	ZB5AW0M53	47
ZB5AJ7	31	ZB5AP6S	17	ZB5AV5D1	51	ZB5AVJ1	48	ZB5AW0M55	47
ZB5AJ8	31	ZB5AP6S	54	ZB5AV5D3	51	ZB5AVJ3	48	ZB5AW0M61	47

ZB5AW0M62	47	ZB5AW133S	20	ZB5AZ1043	44	ZB5CW3436	20	ZBC1	52
ZB5AW0M63	47	ZB5AW143	20	ZB5AZ1044	45	ZB5CW3536	20	ZBC2	52
ZB5AW0M65	47	ZB5AW143S	20	ZB5AZ1045	42	ZB5CW3636	20	ZBC3	52
ZB5AW03D15	50	ZB5AW153	20	ZB5AZ1053	44	ZB5SZ3	63	ZBC4	52
ZB5AW03D35	50	ZB5AW153S	20	ZB5AZ1054	45	ZB5SZ5	63	ZBC5	52
ZB5AW03D45	50	ZB5AW163	20	ZB5AZ1055	42	ZBA1	52	ZBC6	52
ZB5AW03D55	50	ZB5AW163S	20	ZB5AZ1414	45	ZBA2	52	ZBCV0113	55
ZB5AW03D65	50	ZB5AW313	20	ZB5AZ1715626001	64	ZBA3	52	ZBCV0133	55
ZB5AW04D15	50	ZB5AW313S	20	ZB5AZ1715626002	64	ZBA4	52	ZBCV0143	55
ZB5AW04D35	50	ZB5AW333	20	ZB5AZ1715626003	64	ZBA5	52	ZBCV0153	55
ZB5AW04D45	50	ZB5AW333S	20	ZB5CA0	14	ZBA6	52	ZBCV0163	55
ZB5AW04D55	50	ZB5AW343	20	ZB5CA1	14	ZBA9	52	ZBCW9113	55
ZB5AW04D65	50	ZB5AW343S	20	ZB5CA2	14	ZBA131	53	ZBCW9133	55
ZB5AW05D15	50	ZB5AW353	20	ZB5CA3	14	ZBA71	23	ZBCW9143	55
ZB5AW05D35	50	ZB5AW353S	20	ZB5CA4	14	ZBA72	23	ZBCW9153	55
ZB5AW05D45	50	ZB5AW363	20	ZB5CA5	14	ZBA73	23	ZBCW9163	55
ZB5AW05D55	50	ZB5AW363S	20	ZB5CA6	14	ZBA74	23	ZBCW9313	55
ZB5AW05D65	50	ZB5AW513	20	ZB5CA16	15	ZBA75	23	ZBCW9333	55
ZB5AW7A9	22	ZB5AW533	20	ZB5CA26	15	ZBA76	23	ZBCW9343	55
ZB5AW7A1715	22	ZB5AW543	20	ZB5CA36	15	ZBA133	53	ZBCW9353	55
ZB5AW7A1720	22	ZB5AW553	20	ZB5CA46	15	ZBA136	53	ZBCW9363	55
ZB5AW7A1721	22	ZB5AW563	20	ZB5CA56	15	ZBA137	53	ZBD8D1	65
ZB5AW7A1724	22	ZB5AW713	25	ZB5CA66	15	ZBA141	53	ZBDA185	65
ZB5AW7A3740	22	ZB5AW733	25	ZB5CA331	18	ZBA142	53	ZBDD2	65
ZB5AW7A3741	22	ZB5AW743	26	ZB5CA432	18	ZBA145	53	ZBDLU1	65
ZB5AW7L3740	22	ZB5AW753	25	ZB5CA2912	18	ZBA232	53	ZBDLU2	65
ZB5AW7L3741	22	ZB5AW763	25	ZB5CA2934	18	ZBA233	53	ZBDLU3	65
ZB5AW11	21	ZB5AW913	20	ZB5CA6939	18	ZBA234	53	ZBDLU4	65
ZB5AW11S	21	ZB5AW933	20	ZB5CH0	28	ZBA235	53	ZBDLU5	65
ZB5AW13	21	ZB5AW943	20	ZB5CH01	28	ZBA245	53	ZBDLU6	65
ZB5AW13S	21	ZB5AW953	20	ZB5CH02	28	ZBA331	53	ZBDLU7	65
ZB5AW14	21	ZB5AW963	20	ZB5CH03	28	ZBA333	53	ZBDLU8	65
ZB5AW14S	21	ZB5AX2	25	ZB5CH04	28	ZBA334	53	ZBDLU9	65
ZB5AW15	21	ZB5AX84	26	ZB5CH05	28	ZBA335	53	ZBDLU10	65
ZB5AW15S	21	ZB5AZ009	40	ZB5CH06	28	ZBA336	53	ZBDLU11	65
ZB5AW16	21		42	ZB5CH313	28	ZBA337	53	ZBDLU12	65
ZB5AW16S	21		43	ZB5CH333	28	ZBA338	53	ZBDLU13	65
ZB5AW17	21	ZB5AZ009	45	ZB5CH343	28	ZBA341	53	ZBDLU14	65
ZB5AW17S	21	ZB5AZ021	63	ZB5CH353	28	ZBA342	53	ZBE000	63
ZB5AW31	21	ZB5AZ022	63	ZB5CH363	28	ZBA343	53	ZBE101	40
ZB5AW031	50	ZB5AZ023	63	ZB5CL1	16	ZBA344	53	ZBE102	40
ZB5AW31S	21	ZB5AZ024	63	ZB5CL2	16	ZBA346	53	ZBE201	40
ZB5AW33	21	ZB5AZ025	63	ZB5CL3	16	ZBA432	53	ZBE202	40
ZB5AW33S	21	ZB5AZ026	63	ZB5CL4	16	ZBA433	53	ZBE203	40
ZB5AW34	21	ZB5AZ31	64	ZB5CL5	16	ZBA434	53	ZBE204	40
ZB5AW34S	21	ZB5AZ079	43	ZB5CL6	16	ZBA435	53	ZBE205	40
ZB5AW35	21	ZB5AZ101	40	ZB5CV003	36	ZBA639	53	ZBE501	40
ZB5AW035	50	ZB5AZ102	40	ZB5CV013	36	ZBA708	23	ZBE502	40
ZB5AW35S	21	ZB5AZ103	40	ZB5CV033	36	ZBA709	23	ZBE503	40
ZB5AW36	21	ZB5AZ104	40	ZB5CV043	36	ZBA710	23	ZBE504	40
ZB5AW36S	21	ZB5AZ105	40	ZB5CV053	36	ZBA2934	53	ZBE505	40
ZB5AW37	21	ZB5AZ141	40	ZB5CV063	36	ZBA2935	53	ZBE701	43
ZB5AW37S	21	ZB5AZ901	64	ZB5CW113	20	ZBA7131	23	ZBE702	43
ZB5AW041	50	ZB5AZ902	64	ZB5CW133	20	ZBA7134	23	ZBE1013	44
ZB5AW045	50	ZB5AZ905	64	ZB5CW143	20	ZBA7138	23	ZBE1014	45
ZB5AW051	50	ZB5AZ1013	44	ZB5CW153	20	ZBA7232	23	ZBE1015	42
ZB5AW055	50	ZB5AZ1014	45	ZB5CW163	20	ZBA7233	23	ZBE1016	40
ZB5AW061	50	ZB5AZ1015	42	ZB5CW313	20	ZBA7235	23	ZBE1016P	40
ZB5AW062	50	ZB5AZ1023	44	ZB5CW333	20	ZBA7237	23	ZBE1016P3	44
ZB5AW063	50	ZB5AZ1024	45	ZB5CW343	20	ZBA7331	23	ZBE1023	44
ZB5AW065	50	ZB5AZ1025	42	ZB5CW353	20	ZBA7333	23	ZBE1024	45
ZB5AW113	20	ZB5AZ1033	44	ZB5CW363	20	ZBA7335	23	ZBE1025	42
ZB5AW113S	20	ZB5AZ1034	45	ZB5CW3136	20	ZBA7336	23	ZBE1026	40
ZB5AW133	20	ZB5AZ1035	42	ZB5CW3336	20	ZBA7432	23	ZBE1026P	40

ZBE1026P3	44	ZBV18G5	41	ZBVM3	41	ZBY1204	61	ZBY02147	58
ZBE2013	44	ZBV18G6	41	ZBVM4	41	ZBY1207	61	ZBY2148	56
ZBE2023	44	ZBV18M1	41	ZBVM5	41	ZBY1208	61	ZBY02148	58
ZBE2033	44	ZBV18M3	41	ZBVM6	41	ZBY1214	61	ZBY2164	56
ZBE2043	44	ZBV18M4	41	ZBVM14	45	ZBY1303	61	ZBY02164	58
ZBE2053	44	ZBV18M5	41	ZBVM15	42	ZBY1304	61	ZBY2165	56
ZBE5013	44	ZBV18M6	41	ZBVM34	45	ZBY1311	61	ZBY02165	58
ZBE5023	44	ZBV0103S	55	ZBVM35	42	ZBY1312	61	ZBY2166	56
ZBE5033	44	ZBV0113	55	ZBVM44	45	ZBY1316	61	ZBY02166	58
ZBE5043	44	ZBV0133	55	ZBVM45	42	ZBY1912	61	ZBY2167	56
ZBE5053	44	ZBV0143	55	ZBVM54	45	ZBY2101	56	ZBY02167	58
ZBE7016	43	ZBV0153	55	ZBVM55	42	ZBY2103	56	ZBY2178	56
ZBE7026	43	ZBV0163	55	ZBVM64	45	ZBY02103	58	ZBY02178	58
ZBE10163	44	ZBV1	41	ZBVM65	42	ZBY2104	56	ZBY2179	56
ZBE10263	44	ZBVB3	41	ZBW911	55	ZBY02104	58	ZBY02179	58
ZBG421E	65	ZBVB4	41	ZBW913	55	ZBY2105	56	ZBY2184	56
ZBG421EP	65	ZBVB5	41	ZBW914	55	ZBY02105	58	ZBY02184	58
ZBG455	65	ZBVB6	41	ZBW915	55	ZBY2106	56	ZBY2185	56
ZBG455P	65	ZBVB14	45	ZBW916	55	ZBY02106	58	ZBY02185	58
ZBG458A	65	ZBVB15	42	ZBW917	55	ZBY2107	56	ZBY2186	56
ZBG458AP	65	ZBVB17	43	ZBW931	55	ZBY02107	58	ZBY02186	58
ZBG520E	65	ZBVB34	45	ZBW933	55	ZBY2108	56	ZBY2195	56
ZBG520EP	65	ZBVB35	42	ZBW934	55	ZBY02108	58	ZBY02195	58
ZBG2201	39	ZBVB37	43	ZBW935	55	ZBY2109	56	ZBY2196	56
ZBG2401	39	ZBVB44	45	ZBW936	55	ZBY02109	58	ZBY02196	58
ZBG3131A	65	ZBVB45	42	ZBW937	55	ZBY2110	56	ZBY2197	56
ZBG3131AP	65	ZBVB47	43	ZBW9113	55	ZBY02110	58	ZBY02197	58
ZBG4201	39	ZBVB54	45	ZBW9133	55	ZBY2111	56	ZBY2198	56
ZBG4401	39	ZBVB55	42	ZBW9143	55	ZBY02111	58	ZBY02198	58
ZBGK	65	ZBVB57	43	ZBW9153	55	ZBY2112	56	ZBY2199	56
ZBGP	65	ZBVB64	45	ZBW9163	55	ZBY02112	58	ZBY02199	58
ZBL1	52	ZBVB65	42	ZBW9313	55	ZBY2113	56	ZBY2203	57
ZBL2	52	ZBVB67	43	ZBW9333	55	ZBY02113	58	ZBY02203	59
ZBL3	52	ZBVBG1	41	ZBW9343	55	ZBY2114	56	ZBY2204	57
ZBL4	52	ZBVBG3	41	ZBW9353	55	ZBY02114	58	ZBY02204	59
ZBL5	52	ZBVBG4	41	ZBW9363	55	ZBY2115	56	ZBY2205	57
ZBL6	52	ZBVBG5	41	ZBY001	40	ZBY02115	58	ZBY02205	59
ZBL9	52	ZBVBG6	41		42	ZBY2116	56	ZBY2206	57
ZBP0	54	ZBVG1	41		44	ZBY02116	58	ZBY02206	59
ZBP0A	54	ZBVG3	41	ZBY2H101	56	ZBY2123	56	ZBY2207	57
ZBP011	54	ZBVG4	41	ZBY4H101	56	ZBY02123	58	ZBY02207	59
ZBP012	54	ZBVG5	41	ZBY6H101	60	ZBY2126	56	ZBY2208	57
ZBP013	54	ZBVG6	41	ZBY6H102	60	ZBY02126	58	ZBY02208	59
ZBP014	54	ZBVG14	45	ZBY0101	58	ZBY2127	56	ZBY2209	57
ZBP015	54	ZBVG15	42	ZBY0102	58	ZBY02127	58	ZBY02209	59
ZBP016	54	ZBVG34	45	ZBY0104	56	ZBY2128	56	ZBY2210	57
ZBP017	54	ZBVG35	42	ZBY00104	58	ZBY02128	58	ZBY02210	59
ZBPA	54	ZBVG44	45	ZBY0123	56	ZBY2129	56	ZBY2211	57
ZBV5B	41	ZBVG45	42	ZBY00123	58	ZBY02129	58	ZBY02211	59
ZBV6	51	ZBVG54	45	ZBY0140	58	ZBY02130	58	ZBY2212	57
ZBV011	55	ZBVG55	42	ZBY1101	61	ZBY2130	56	ZBY02212	59
ZBV013	55	ZBVG64	45	ZBY1103	61	ZBY2131	56	ZBY2213	57
ZBV014	55	ZBVG65	42	ZBY1104	61	ZBY02131	58	ZBY02213	59
ZBV015	55	ZBVJ1	41	ZBY1105	61	ZBY2132	56	ZBY2214	57
ZBV016	55	ZBVJ3	41	ZBY1106	61	ZBY02132	58	ZBY02214	59
ZBV017	55	ZBVJ4	41	ZBY1107	61	ZBY2133	56	ZBY2223	57
ZBV18B1	41	ZBVJ5	41	ZBY1108	61	ZBY02133	58	ZBY02223	59
ZBV18B3	41	ZBVJ6	41	ZBY1115	61	ZBY2134	56	ZBY2226	57
ZBV18B4	41	ZBVJ15	42	ZBY1116	61	ZBY02134	58	ZBY02226	59
ZBV18B5	41	ZBVJ35	42	ZBY1146	61	ZBY2135	56	ZBY2227	57
ZBV18B6	41	ZBVJ45	42	ZBY1147	61	ZBY02135	58	ZBY02227	59
ZBV18G1	41	ZBVJ55	42	ZBY1148	61	ZBY2146	56	ZBY2228	57
ZBV18G3	41	ZBVJ65	42	ZBY1149	61	ZBY02146	58	ZBY02228	59
ZBV18G4	41	ZBVM1	41	ZBY1203	61	ZBY2147	56	ZBY2229	57

ZBY02229	59	ZBY02327	59	ZBY55130	60
ZBY2230	57	ZBY2328	57	ZBY55330	60
ZBY02230	59	ZBY02328	59	ZBY22420001	57
ZBY2231	57	ZBY2330	57	ZBY022420001	59
ZBY02231	59	ZBY02330	59	ZBZ001	40
ZBY2232	57	ZBY2334	57		44
ZBY02232	59	ZBY02334	59	ZBZ003	63
ZBY2233	57	ZBY2364	57	ZBZ006	43
ZBY02233	59	ZBY02364	59	ZBZ007	63
ZBY2234	57	ZBY2366	57	ZBZ8	64
ZBY02234	59	ZBY02366	59	ZBZ010	43
ZBY2235	57	ZBY2367	57	ZBZ011	43
ZBY02235	59	ZBY02367	59	ZBZ012	43
ZBY2265	57	ZBY2385	57	ZBZ28	27
ZBY02265	59	ZBY02385	59		62
ZBY2266	57	ZBY2387	57	ZBZ32	56
ZBY02266	59	ZBY02387	59	ZBZ33	60
ZBY2267	57	ZBY2931	56	ZBZ34	56
ZBY02267	59	ZBY02931	58	ZBZ35	60
ZBY2284	57	ZBY4100	59	ZBZ58	27
ZBY02284	59	ZBY4101	56		62
ZBY2295	57	ZBY4140	56	ZBZ60	63
ZBY02295	59	ZBY5100	60	ZBZ1600	62
ZBY2297	57	ZBY5101	60	ZBZ1602	62
ZBY02297	59	ZBY5102	60	ZBZ1604	62
ZBY2298	57	ZBY6101	60	ZBZ1606	62
ZBY02298	59	ZBY6102	60	ZBZ2102	62
ZBY2299	57	ZBY6140	60	ZBZ3605	62
ZBY02299	59	ZBY8101	61	ZBZG156	41
ZBY2303	57	ZBY8130	61	ZBZM156	41
ZBY02303	59	ZBY8140	61	ZBZVG	41
ZBY2304	56	ZBY8160	61	ZBZVM	41
ZBY02304	58	ZBY8230	61	ZD5PA12	39
ZBY2305	57	ZBY8260	61	ZD5PA14	39
ZBY02305	59	ZBY8330	61	ZD5PA22	39
ZBY2306	57	ZBY8360	61	ZD5PA24	39
ZBY02306	59	ZBY8430	61	ZD5PA103	39
ZBY2307	57	ZBY8460	61	ZD5PA203	39
ZBY02307	59	ZBY8630	61		
ZBY2308	57	ZBY8660	61		
ZBY02308	59	ZBY9101	61		
ZBY2309	57	ZBY9101T	62		
ZBY02309	59	ZBY9120	27		
ZBY2310	57		62		
ZBY02310	59	ZBY9121	27		
ZBY2311	57		62		
ZBY02311	59	ZBY9130T	62		
ZBY2312	57	ZBY9140T	62		
ZBY02312	59	ZBY9160	61		
ZBY2313	57	ZBY9160T	62		
ZBY02313	59	ZBY9220	27		
ZBY2314	57		62		
ZBY02314	59	ZBY9230T	62		
ZBY2316	57	ZBY9260	61		
ZBY02316	59	ZBY9260T	62		
ZBY2321	57	ZBY9320	27		
ZBY02321	59		62		
ZBY2322	57	ZBY9330T	62		
ZBY02322	59	ZBY9360	61		
ZBY2323	57	ZBY9360T	62		
ZBY02323	59	ZBY9420	27		
ZBY2326	57		62		
ZBY02326	59	ZBY9460	61		
ZBY2327	57	ZBY9620	27		
			62		
		ZBY9660	61		



Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.schneider-electric.com/control

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric